

# Fall arrest lanyard


ADJUSTABLE TWIN

**TECHNICAL SPECIFICATION**


**HEIGHT SAFETY**

Twin adjustable fall arrest lanyard from 1.45 m up to 2 m.  
Equipped with 1 standard connector on one end and 2 scaffold hooks on the other end.

**FAR0311**

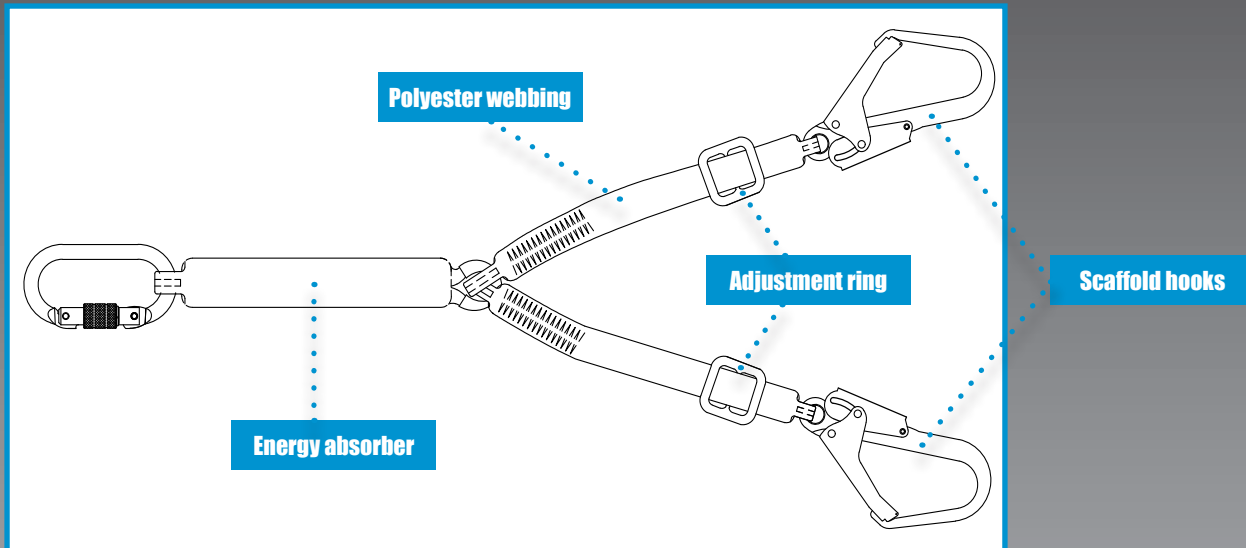

**Stitching pattern**



## METAL COMPONENTS

Material: Alloy steel.

Finish: Galvanized Yellow/Gold.

Breaking strength: 25 kN and 23kN for the scaffold hooks.

## DIMENSIONS

Size: maximum 2 meters.

Weight: 1935 g (+/- 10 g).

## CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that NO alterations to the product are made.

Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

## STITCHING THREAD

Material: High-tenacity polyester.

## WEBBING

Material: polyester.

Width: 30+/-1 mm.

Breaking strength: 25 kN.

## CHARACTERISTICS

Adjustable twin webbing lanyard from 1.45 m to 2 m with shock absorber.

30 mm wide polyester webbing with textile loops on both ends.

On one end lanyard with energy absorber and 1 connector.

On the other ends 2 scaffold hooks.

1 screw gate onnector in alloy steel. Gate opening 18 mm.

Conforms to EN362:2004 class B & M.

2 steel scaffold hooks. Gate opening 50.8 mm.

Conforms to EN362:2004 Class T.

## CONFORMITY

EN 355: 2002

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN for 3 Minutes.

Dynamic strength: Maximum breaking force does not exceed 6kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kgs.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



**MANUFACTURING FOR SAFETY**  
**WWW.JPSAFETY.COM**

**UKSALES@JSP.CO.UK**  
**TEL: +44 (0)1993 826050**



Issued 18/11/2019-1