


Harness K2™ 5 POINTS

The premium range of JSP harnesses. Designed for intensive use to be a comfortable, effective and ergonomic equipment with the highest standard of safety.

TECHNICAL SPECIFICATION


HEIGHT SAFETY

FAR0403

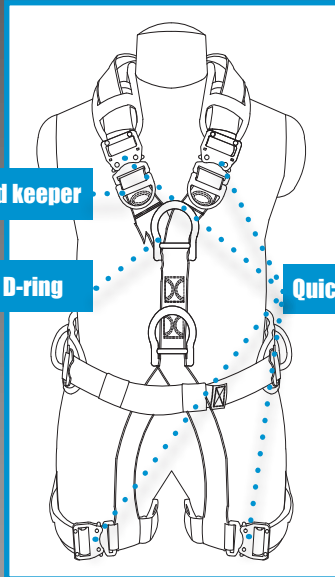


Work positioning D-ring

Back D-ring

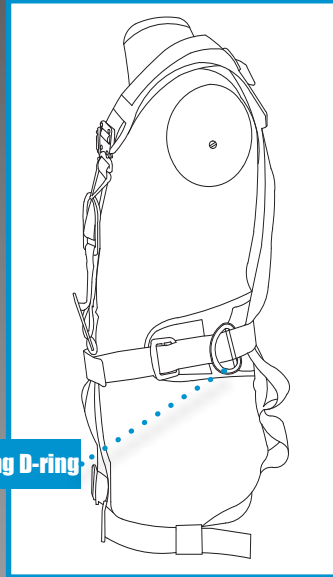

Back Plate

Polyester padding for extra comfort

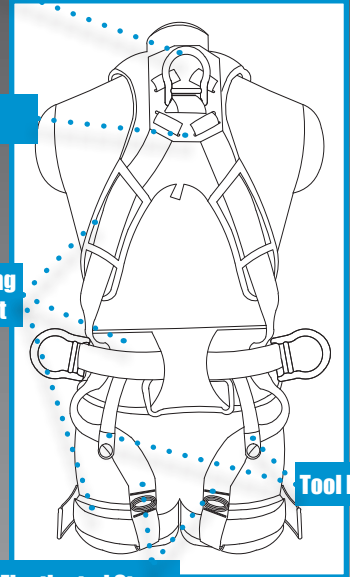

Tool keepers

Elasticated Strap

Stitching pattern



METAL COMPONENTS

Material: Alloy steel, D-ring in aluminium alloy.

Finish: Black Powder coated.

Breaking strength: 23 kN D-ring (15kN buckles and frames).

STITCHING THREAD

Material: High-tenacity polyester.

DIMENSIONS

Size: Universal.

Weight: 2500 g (+- 10 g).

CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

WEBBING

Material: Polyester.

Width: 44+-1 mm.

Breaking strength: 25 kN.

CHARACTERISTICS

One dorsal attachment D-ring for fall arrest.

Two front textile loops for fall arrest.

Adjustable & elastically leg straps.

Adjustable shoulders straps with lanyard keepers.

Adjustable waist straps.

Polyester paddings for extra comfort (legs, back and waist).

Work positioning ergonomic belt with 2 lateral D-rings incorporated.

Tool keepers on the belt.

Labels of inspection and instructions protected in a black PVC pouch.

One front D-ring at waist level for rope access.

Quick release buckles for an easy donning.

CONFORMITY

EN 361: 2002, EN 358: 1999 & EN 813: 2008 Rated to 140 kg.

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN for 3 min at each attachment element.

Dynamic strength: Free fall from 4 m height donned to a test dummy weighing 100 kg at each attachment element.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 15/03/2020-1