


Fall arrest Lanyard SINGLE

**TECHNICAL
SPECIFICATION**

HEIGHT SAFETY

The high quality kernmantle rope with aluminium connectors make a high quality and light lanyard for everyday use. This lanyard can be used over sharp edges like for example on terrace roofs.

FAR0410

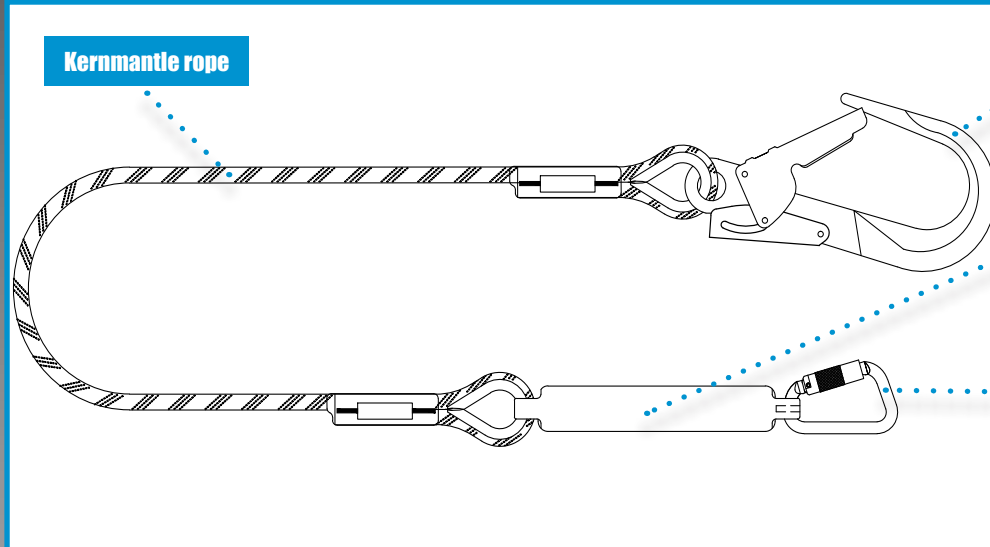

FAR0901

Energy absorber

FAR0905

METAL COMPONENTS

Material: Connectors in aluminium

Finish: Black

Breaking strength: 23 kN (22 kN for the scaffold hook)

DIMENSIONS

Size: 2 meters

Weight: 1050 g (+/- 10 g)

CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that NO alterations to the product are made.

Ensure that the following cleaning methods are NOT used: water over 40°C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

ROPE

Material: Kernmantle rope (anticut) lanyard diameter 11 mm

Black with green tracer in the rope to indicate degradation of the material

Breaking strength: 25 kN

CHARACTERISTICS

Kernmantle rope lanyard (anticut) diameter 11 mm with shock absorber.

Rope ends stitched and covered with polyethylene protective sleeve.

Abrasion resistant thimbles provided within loops.

On one end, shock absorber with fall indicator and 1 quarter turn connector. On the other end, 1 scaffold hook.

1 quarter turn aluminium connector. Gate opening: 21 mm.
Conforms to EN362:2004 Class B.

1 aluminium scaffold hook. Gate opening 60 mm.
Conforms to EN362:2004 Class A/T.

CONFORMITY

EN 355: 2002, VG 11 RFU CNB/P/11.074

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN for 3 Minutes.

Dynamic strength: Maximum breaking force does not exceed 6kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kgs. One drop test is carried out at right angle to the edge and another one with a lateral offset of 1.50m.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 09/12/2019-1