



This highly visible Medium Duty Railing System separates and protects machinery and pedestrian walkways from light duty vehicular traffic effectively and inexpensively. Ideal for protecting buildings, inventory and workspaces. It is easily and quickly installed with no protruding lugs or bolts.

**Finish:**

For Indoor use: Powder coated yellow.  
For Outdoor use: Hot Dip Galvanised and Powder coated yellow.

**Specifications:**

Support posts: 3mm wall thickness with black cap.

Base plate: 140 x 160 x 10mm (Drilled 4 fixing holes)


Lateral rails: 60 x 40mm with 3mm wall thickness

Under-run rail: 200 x 100 x 4 mm

**Option:**



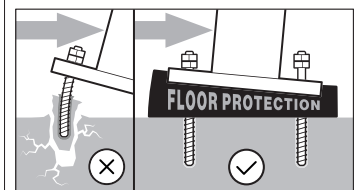

Can also be supplied in our **FLEX** system (see page 30 for details).


- Indoor and Outdoor use
- Excellent build quality and strength
- Quickly and easily installed
- Modular construction for easy extension
- Highly visible
- TUV-tested according to DGUV 108-007



Collision Protection

Fixings	Dimensions (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface fixing bolt S14 (4 per post)	10/100	0.2	109.17.393	1 / 2 days
Through bolt anchor (4 per post)	12/120	0.3	109.24.665	

Lateral Rails (mm) including fixing screws			
1,000	1,200	1,500	2,000
			
5	6	7	9
194.21.266	194.27.076	194.25.352	194.25.650
5 / 10 days			
194.29.126	194.27.265	194.27.828	194.29.847
5 / 10 days			

Dimensions (mm) H x D x WT	Under-run Guard (mm), Steel			
	800	1,080	1,380	1,880
200 x 100 x 4				
Delivery weight (kg/ea.)	9	11	13.5	17.5
<b>Powder coated</b>	194.20.522	194.24.463	194.23.061	194.20.550
Number of surface fixing bolts per length	4	4	5	5
Typical despatch time (working days)	5 / 10 days			