




Above: ref. 9180, 800 x 400 mm

FRAMES

UV inhibited frames: Anti-UV treated frames to avoid yellowing and embrittlement in the event of long-term external exposure.

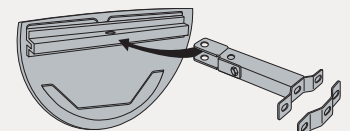

for wall or post

INSTALLATION

Multi-purpose mirrors are supplied with fully adjustable bolts and galvanised steel bracket kit for wall or post from 60 to 90mm in diameter. The kit allows the optimum orientation to be easily achieved. **The kit is robust and tested to withstand winds of up to 183 km/h.**

P.A.S.® QUALITIES

| MAXIMUM VIEWING DISTANCE | OPTICS (mm) | FRAME (mm) | PRODUCT CODE |
|--------------------------|---|------------|--------------|
| 8 metres | 800 x 400  | 900 x 500 | 9180 |
| 10 metres | 900 x 450  | 1050 x 600 | 9195 |



ACCESSORIES (see p. 50) Galvanised steel posts available for all models.