




Above: ref. 108, Ø 800 mm

INSTALLATION STANDARD FORMAT


The mirrors are equipped with an articulated positioning ball joint allowing 105° of movement and are supplied with a choice of fixings:

- > fixed arm fittings.
- > flexible arm fittings (BF) which can be moved in any direction.

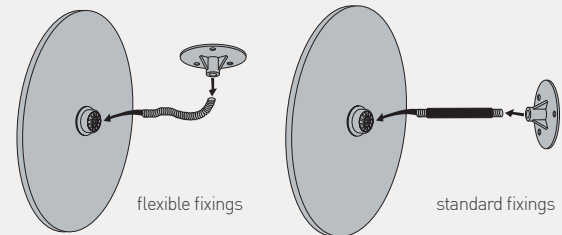

INSTALLATION LARGE FORMAT

The mirrors are supplied with fully adjustable bolts and galvanised steelbracket kit for wall or round posts (Ø34 to 90mm). The kit allows the optimum orientation to be easily achieved.



for wall or post

STANDARD FORMAT MIRRORS

POLYMir® QUALITIES

MAXIMUM VIEWING DISTANCE	OPTICS (mm)	STANDARD FIXINGS PRODUCT CODE	FLEXIBLE FIXINGS PRODUCT CODE
2 metres	Ø 300 ●	103	103 BF
4 metres	Ø 400 ●	104	104 BF
6 metres	Ø 500 ●	105	105 BF
8 metres	Ø 600 ●	106	106 BF
12 metres	600 x 400 ■	110	110 BF



LARGE FORMAT MIRRORS

POLYMir® QUALITIES

MAXIMUM VIEWING DISTANCE	OPTICS (mm)	PRODUCT CODE
15 metres	Ø 800 ●	108
20 metres	800 x 600 ■	118
25 metres	Ø 900 ●	109
30 metres	1000 x 800 ■	119

