




GFC5000

1000mm

Galvanised or Galvanised & Colour

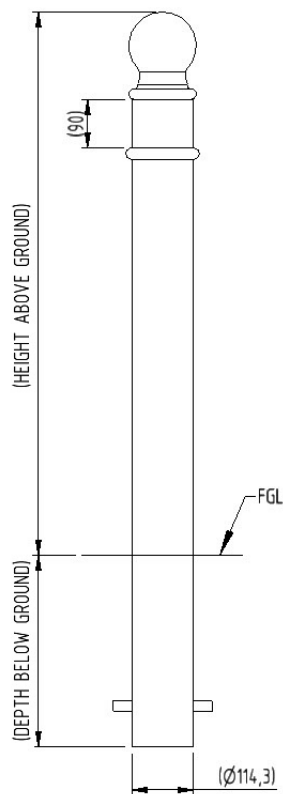

The GFC5000 Ornamental Mild Steel Bollard from AUTOPA is suitable for a wide range of locations and purposes. Constructed using mild steel, then galvanised to ensure its longevity. Cap and ring are welded onto the steel tube to complete the design.

Supplied concrete in as standard, bolt down and removable versions are also available.

The bollards are available in a galvanised and galvanised and coated finish (RAL numbers must be specified at time of order).

Eyelets, hooks and chains can be added to these bollards to complete the decorative effect.

| Part Number | Description | Lift Weight (kg) | Weight (kg) |
|-------------|-----------------------------------|------------------|-------------|
| 138 120 081 | Galvanised - Concrete In | | 15kg |
| 138 120 082 | Galvanised & Black - Concrete In | | 15kg |
| 138 120 083 | Galvanised & Colour - Concrete In | | 15kg |
| 138 120 084 | Galvanised - Bolt Down | | 15kg |
| 138 120 085 | Galvanised & Black - Bolt Down | | 15kg |
| 138 120 086 | Galvanised & Colour - Bolt Down | | 15kg |
| 138 120 087 | Galvanised - Removable | 15kg | 23kg |
| 138 120 089 | Galvanised & Black - Removable | 15kg | 23kg |
| 138 120 088 | Galvanised & Colour - Removable | 15kg | 23kg |

Product details

- 1000mm Height above ground
- 114mm Diameter
- 3mm wall thickness
- Concrete in 300mm (below ground)
- Price excludes fixing down bolts and padlock to secure
- Socket - 300mm (below ground)

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



01905 794 875

StartSafety.uk

sales@startsafety.uk

