




GFC6000

1000mm

Galvanised or Galvanised & Colour

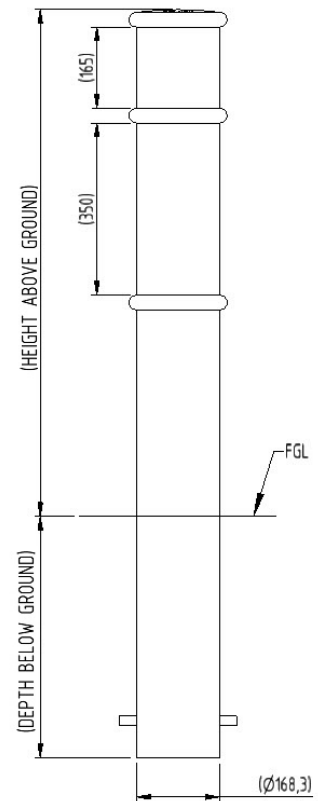

The GFC6000 Ornamental Mild Steel Bollard from AUTOPA is suitable for a wide range of locations and purposes. Constructed using mild steel, then galvanised to ensure its longevity. Cap and rings are welded onto the steel tube to complete the design.

Supplied concrete in as standard, bolt down and removable versions are also available.

The bollards are available in a galvanised and galvanised and coated finish (RAL numbers must be specified at time of order).

Eyelets, hooks and chains can be added to these bollards to complete the decorative effect.

Part Number	Description	Lift Weight (kg)	Weight (kg)
138 120 091	Galvanised - Concrete In		38kg
138 120 092	Galvanised & Black - Concrete In		38kg
138 120 093	Galvanised & Colour - Concrete In		38kg
138 120 094	Galvanised - Bolt Down		38kg
138 120 095	Galvanised & Black - Bolt Down		38kg
138 120 096	Galvanised & Colour - Bolt Down		38kg
138 120 097	Galvanised - Removable	38kg	51kg
138 120 098	Galvanised & Black - Removable	38kg	51kg
138 120 099	Galvanised & Colour - Removable	38kg	51kg

Product details

- 1000mm height above ground
- 168mm diameter
- 5mm wall thickness
- Concrete in 500mm (below ground)
- Price excludes fixing down bolts and padlock to secure
- Socket - 300mm (below ground)

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



01905 794 875
StartSafety.uk
sales@startsafety.uk

