



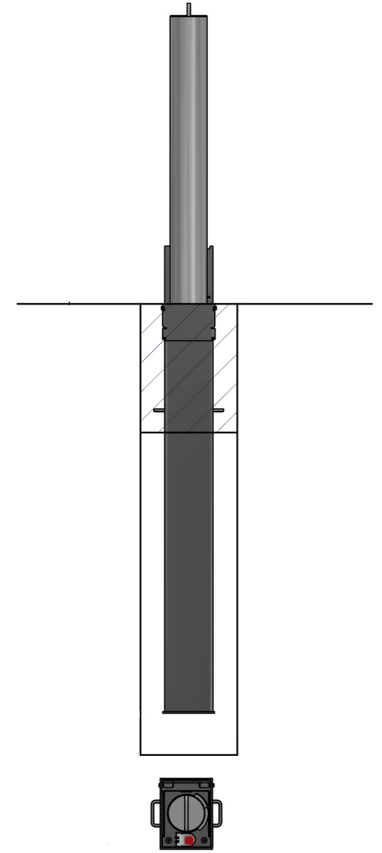

RetractaPost-GL 900

900mm

Galvanised or Galvanised & Colour

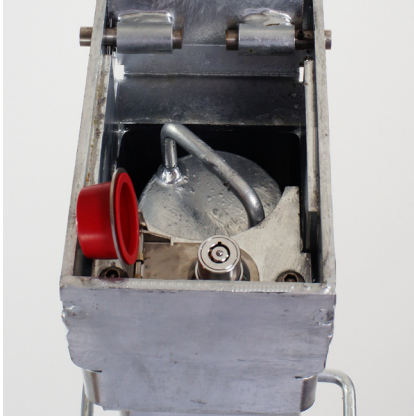

The RetractaPost-GL offers a highly effective and robust way to protect premises and vehicles. The RetractaPost-GL is raised and lowered vertically and is 900mm tall when raised. When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered.

The RetractaPost-GL is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Tested and approved by Sold Secure.

This product has achieved Secure by Design status.

Part Number	Description	Lift Weight (kg)	Weight (kg)
138 130 436	101mm Galvanised	9kg	33kg
138 130 437B	101mm Galvanised & Black	9kg	33kg
138 130 437Y	101mm Galvanised & Yellow	9kg	33kg
138 130 437	101mm Galvanised & Colour	9kg	33kg
138 130 440	114mm Galvanised	12kg	36kg
138 130 443	114mm Galvanised & Black	12kg	36kg
138 130 442	114mm Galvanised & Yellow	12kg	36kg
138 130 441	114mm Galvanised & Colour	12kg	36kg



Secured by Design



Police Preferred Specification

Product details

- 900mm (above ground when raised)
- Socket - 1250mm (below ground)
- 3mm wall thickness
- Red/white chevron tape available extra
- Other colours available on request

Installation & use

Bolt down to a suitable concrete surface.
 Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
 Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
 Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
 +44 (0)1788 550556

AUTOPA Limited
 Cottage Leap, Rugby, Warwickshire CV21 3XP

