




# Sprung Boundary Post Bolt Down or Concrete In Galvanised or Galvanised & Colour

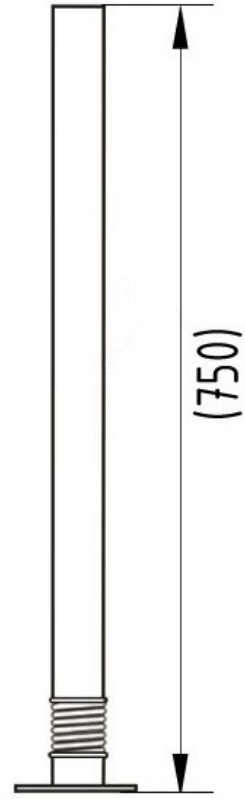

Designed for use delineating the edge of car parking spaces, the Sprung Boundary Post has a spring incorporated into the base which allows it to absorb low speed impacts and return to its original upright position.

The post can deflect up to 30° from the vertical. The Sprung Boundary Post is available in Galvanised and Galvanised and Coated finishes, and available either ragged for casting in to concrete or flanged for bolting down.

The reflective, high visibility band ensures your parking post will always be seen.

<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 100 403	Galvanised - Bolt Down	4kg
138 100 406	Galvanised & Colour - Bolt Down	4kg
138 100 405	Galvanised & Yellow - Bolt Down	4kg
138 100 404	Galvanised & Black - Bolt Down	4kg
138 100 503	Galvanised - Concrete In	4kg
138 100 502	Galvanised & Colour - Concrete In	4kg
138 100 505	Galvanised & Yellow - Concrete In	4kg
138 100 504	Galvanised & Black - Concrete In	4kg

## Product details

- 48mm diameter tube
- 750mm above ground height
- Round flange plate – 133mm x 5mm
- Each post requires 3 bolts

## Installation & use

Bolt down to a suitable concrete surface.  
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.  
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.  
Products are guaranteed for 12 months (if installed and used correctly).



[www.startsafety.uk](http://www.startsafety.uk)  
+44 (0)1905 794875

Start Safety UK  
Drury Lane, Martin Hussingtree WR3 8TD

