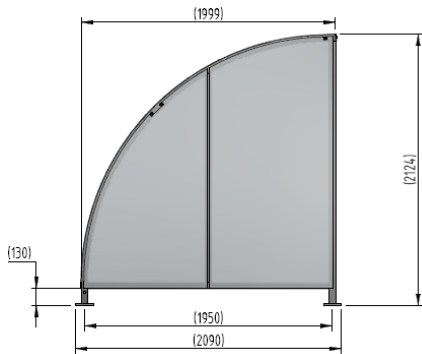# SG1 - Stratford Shelter – With Ends
Galvanised Steel Frame
Galvanised Sheet Clad with Mesh Doors

The Stratford shelter is a free-standing shelter with Mesh Doors lockable by padlock (not included) designed for on site assembly, constructed from galvanised mild steel. Complete Galvanised sheet curved roof and end panels.

Width of 2m, with lengths from 1-5m, extension bays can be added to achieve the desired shelter length.

Bolt down as standard.

Uses

- ☑ Cycle
- ☐ Trolley
- ☐ Sport & Spectators
- ☐ Waiting/Passenger
- ☐ Walkway/Canopy
- ☐ Pay & Display/E.V
- ☐ Smoking/Vaping
- ☐ Bin Store
- ☐ Youth

Part Number	Description	Weight (kg)
138 203 970	Stratford Shelter 1m	179kg
138 203 972	Stratford Shelter 2m	250kg
138 203 974	Stratford Shelter 3m	310kg
138 203 976	Stratford Shelter 4m	401kg
138 203 978	Stratford Shelter 5m	462kg
138 203 971	Stratford Shelter 1m extension bay	
138 203 973	Stratford Shelter 2m extension bay	
138 203 975	Stratford Shelter 3m extension bay	
138 203 977	Stratford Shelter 4m extension bay	
138 203 979	Stratford Shelter 5m extension bay	

Product details

- Height – 2120mm front
- Width – 2000mm overall
- Length – 1m, 2m, 3m, 4m, 5m and extensions
- Square flange plate - 140mm x 140mm x 10mm
- Each flange plate requires 4 bolts
- 1mm galvanised steel panels

Installation & use

This product is guaranteed for 12 months (if installed and used correctly)
Each shelter leg requires bolting down to a suitable concrete surface, using expanding anchor bolts
The area surrounding the installation must be flat and level with no nearby surface irregularities or gradient changes
On-site assembly requires construction skill

British Made

01905 794 875
StartSafety.uk
sales@startsafety.uk

2 x 1
138 203 970

2 x 2
138 203 972

2 x 3
138 203 974

2 x 4
138 203 976

2 x 5
138 203 978

bsi
ISO 9001 Quality Management Systems CERTIFIED
ISO 14001 Environmental Management CERTIFIED
ISO 45001 Occupational Health and Safety Management CERTIFIED