

Product Datasheet


Unheated safety shower with stainless steel open bowl eye wash

EXP-18GS/85G

EXP-18GS/85G (DVGW)

Comprising an overhead drench shower and an eye/face wash, this combination unit is an effective all-in-one decontamination solution. Practical for locations where it will not be liable to freeze or overheat.

- Durable stainless steel open bowl eye/face wash has simple push plate activation with pop off dust covers to protect the aerated diffusers.
- Supplied with safety shower and eye/face wash sign including inserts for mounting to the pipework or pull handle.
- Stainless steel pipework also available in green powder-coated finish (EXP-18GS/85G(PC)).

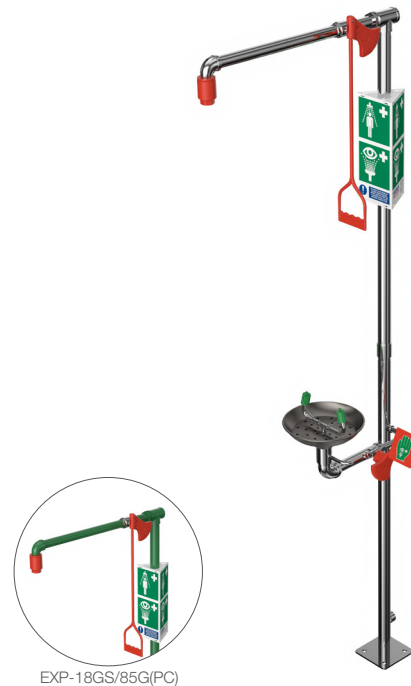

Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	Stainless steel
OPERATING VALVE	Stainless steel, full bore, stay open ball valve
SHOWER NOZZLE	Injection moulded nylon 6 (or brass for DVGW model)
EYE WASH	Stainless steel
EYE WASH DIFFUSERS	Chrome plated brass retaining ring, filter mesh, plastic body and dust covers
STANDARD FINISH	Polished brush
SERVICES	
WATER INLET	1¼" female BSP
OPERATING PRESSURE	2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	Shower: 76 L per minute / 20 US gal per minute Eye wash: 12 L per minute / 3 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
SHOWER	Pull handle
EYE WASH	Push plate
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	416mm (16.4in) x 782mm (30.8in) x 2320mm (91.3in)
WEIGHT	16kg (35lb)

START SAFETY

sales@starttraffic.uk
01905 794 875

General Arrangement Drawing

Unheated safety shower with stainless steel open bowl eye wash

EXP-18GS/85G

EXP-18GS/85G (DVGW)

