


# Martcare™ Fall arrest lanyard SINGLE

Equipped with 1 standard connector on one end and a scaffold hook on the other end.

## TECHNICAL SPECIFICATION

### HEIGHT SAFETY

#### FAR0322

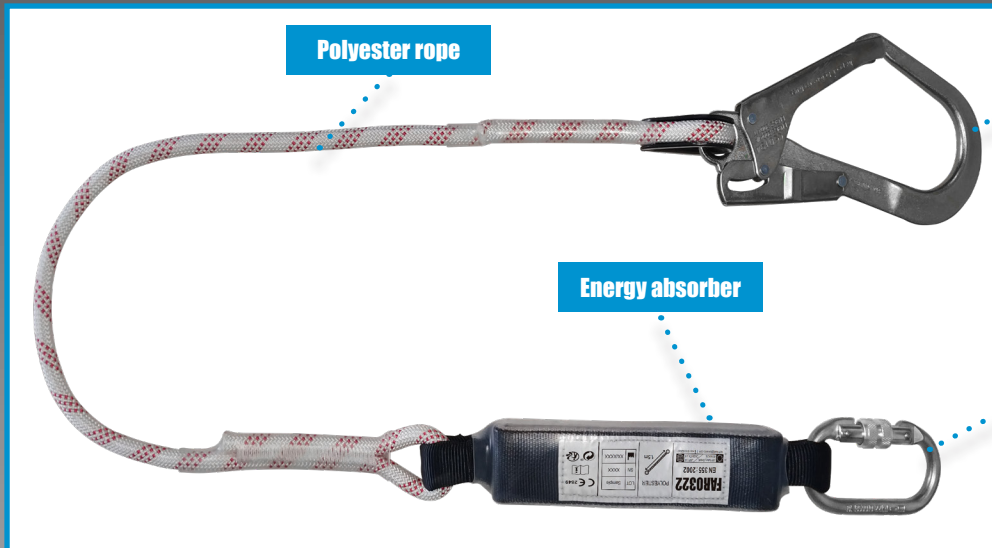

Polyester rope

Scaffold hook

Energy absorber

Karabiner

Stitching pattern

## METAL COMPONENTS

Material: Connectors in alloy steel.

Finish: Silver.

Breaking strength: 25 kN.

## STITCHING THREAD

Material: Polyester.

## ROPE

Material: polyester.

Diameter: 12 mm.

## CHARACTERISTICS

Rope lanyard with shock absorber.

12mm polyester rope with textile loops on both ends.

On one end lanyard with energy absorber and 1 connector.

On the other end 1 scaffold hook.

1 screw gate connector in alloy steel. Gate opening 18 mm.

Conforms to EN362:2004 class B.

1 alloy steel scaffold hook. Gate opening 52 mm.

Conforms to EN362:2004 Class T.

## CONFORMITY

EN 355: 2002

The lifespan of the product is 5 years after date of first use, or, if not recorded, from date of manufacture.

Static strength: 15 kN for 3 Minutes.

Dynamic strength: Maximum breaking force does not exceed 6kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kgs.

## DIMENSIONS

Size: 1.5 meters.

Weight: 1100 g (+/- 10 g).

## CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that NO alterations to the product are made.

Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email [technical@jpsafety.com](mailto:technical@jpsafety.com).



MANUFACTURING FOR SAFETY  
[WWW.JPSAFETY.COM](http://WWW.JPSAFETY.COM)

UKSALES@JSP.CO.UK  
TEL: +44 (0)1993 826050



Issued 15/06/2021-1