



DATA SHEET
1 / 9

Rugged steel barriers for traffic delineation.

BARRIERS

FORTIS


PRODUCT CODE	1.5FHDSB
WL	1500MM
W	510MM
H	443MM
TL	1584MM
REFLECTIVE PANEL	1200 X 240
PIN	X 1
WEIGHT E / F (KG)	58
PER PALLET	3
PER FULL LOAD	144
MATERIAL	STEEL POWDER COATED
COLOUR	RED / WHITE
CALCULATED WIND SPEED	76.8 MPH

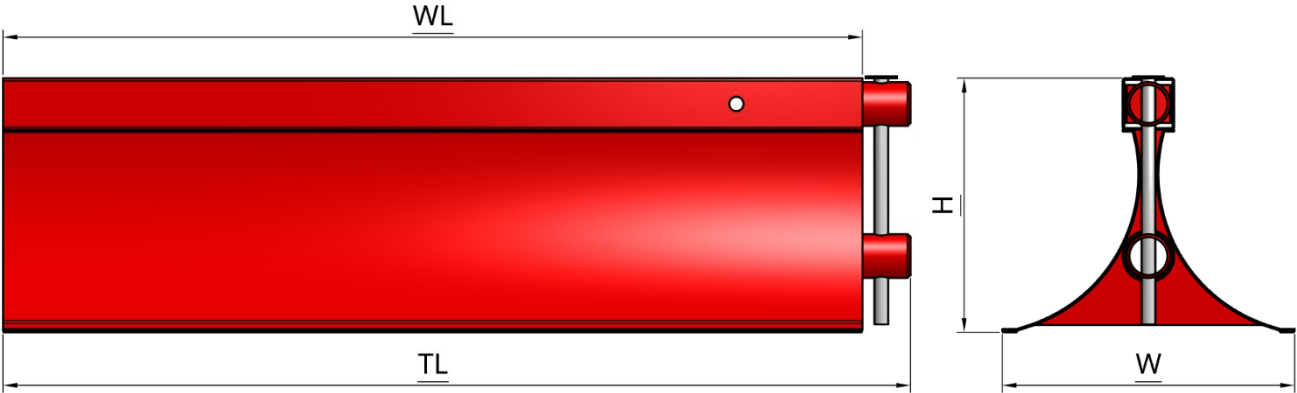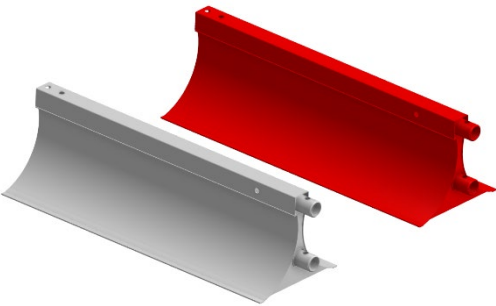

ACCESSORIES

MINI MESH

PRODUCT CODE	FPMP
D	38.1MM
L	1451MM
H	564MM
TH	1007MM
WEIGHT (KG)	5.2
PER PALLET	52
MATERIAL	STEEL GALV / POWDER COATED
COLOUR	GALV / RED / WHITE
CALCULATED WIND SPEED	64.2MPH

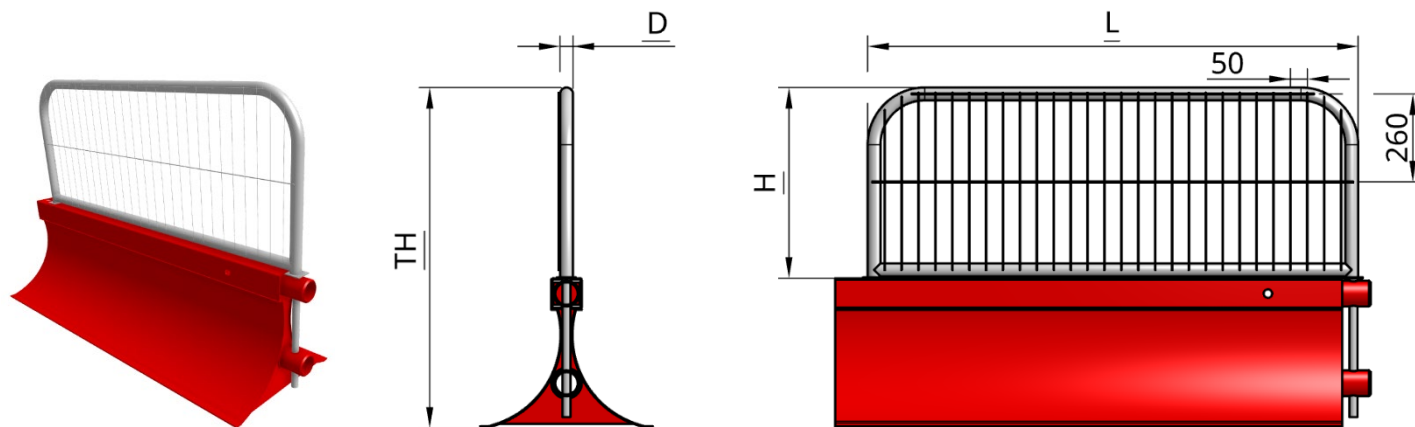


DATA SHEET
3 / 9

Rugged steel barriers for traffic delineation.

ACCESSORIES

LARGE MESH




PRODUCT CODE	2MMFHDHMP
D	38.1MM
W	2954MM
H	1560MM
TH	2003MM
WEIGHT (KG) PER PALLET	
MATERIAL	STEEL GALV / POWDER COATED
COLOUR	GALV / RED / WHITE
CALCULATED WIND SPEED	43.2MPH

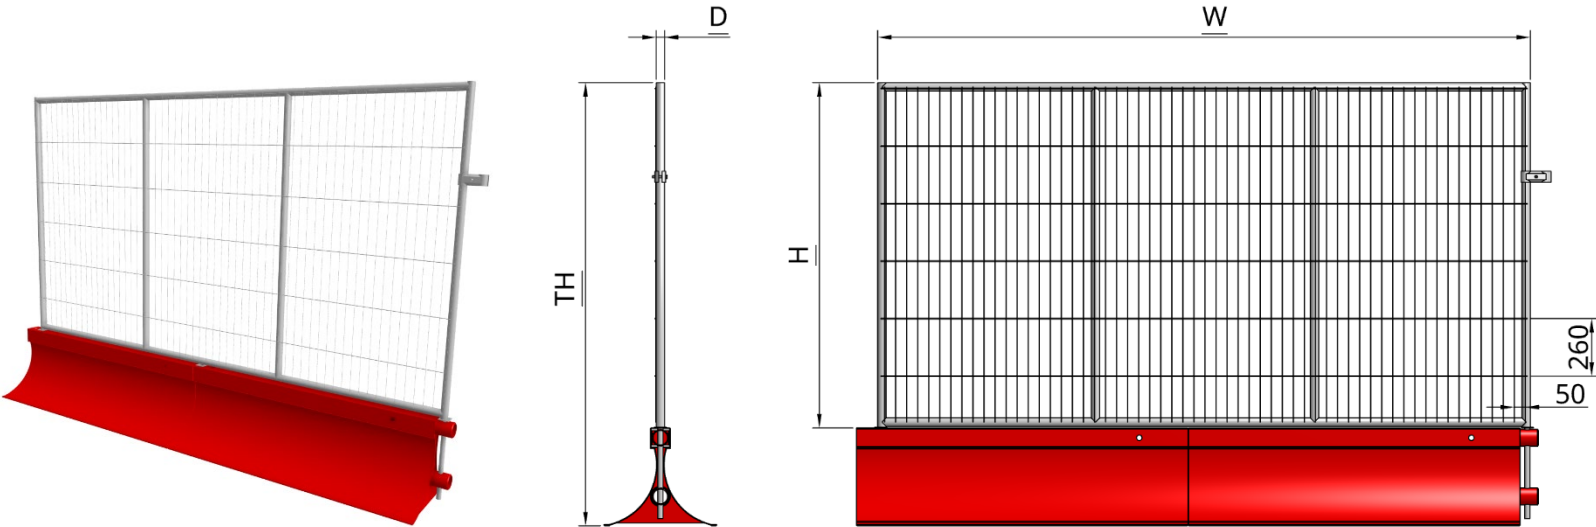

Rugged steel barriers for traffic delineation.


ACCESSORIES

	CORNER FEMALE	CORNER MALE
PRODUCT CODE		
WL	1543MM	1550MM
W	510MM	510MM
H	443MM	443MM
TL	1554MM	1655MM
MAX ANGLE	45 DEG	45 DEG
PIN	X 1	X 1
WEIGHT (KG)		
PER PALLET	1 X PAIR	1 X PAIR
MATERIAL	STEEL POWDER COATED	STEEL POWDER COATED
COLOUR	WHITE	RED
CALCULATED WIND SPEED		

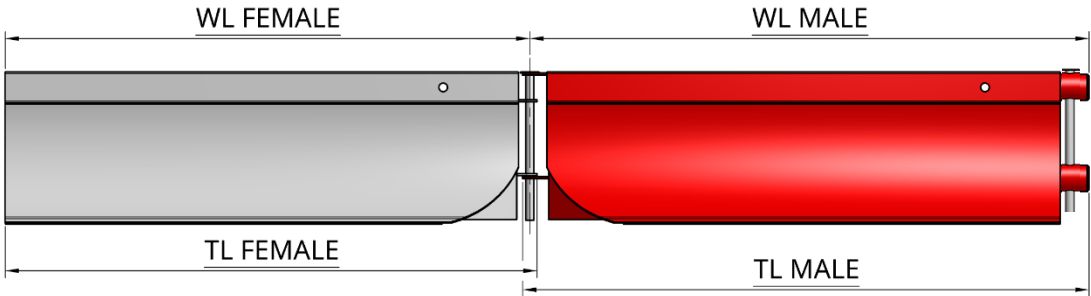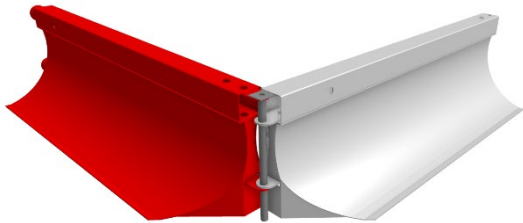

ACCESSORIES

	MINI MESH	CORNER MINI MESH (fits male)
PRODUCT CODE	FPMP	
D	38.1MM	38.1MM
L	1451MM	1531MM
H	564MM	564MM
TH	1007MM	1007MM
WEIGHT (KG)	5.2	
PER PALLET		
MATERIAL	STEEL GALV / POWDER COATED	STEEL GALV / POWDER COATED
COLOUR	GALV / RED / WHITE	GALV / RED / WHITE
CALCULATED WIND SPEED		

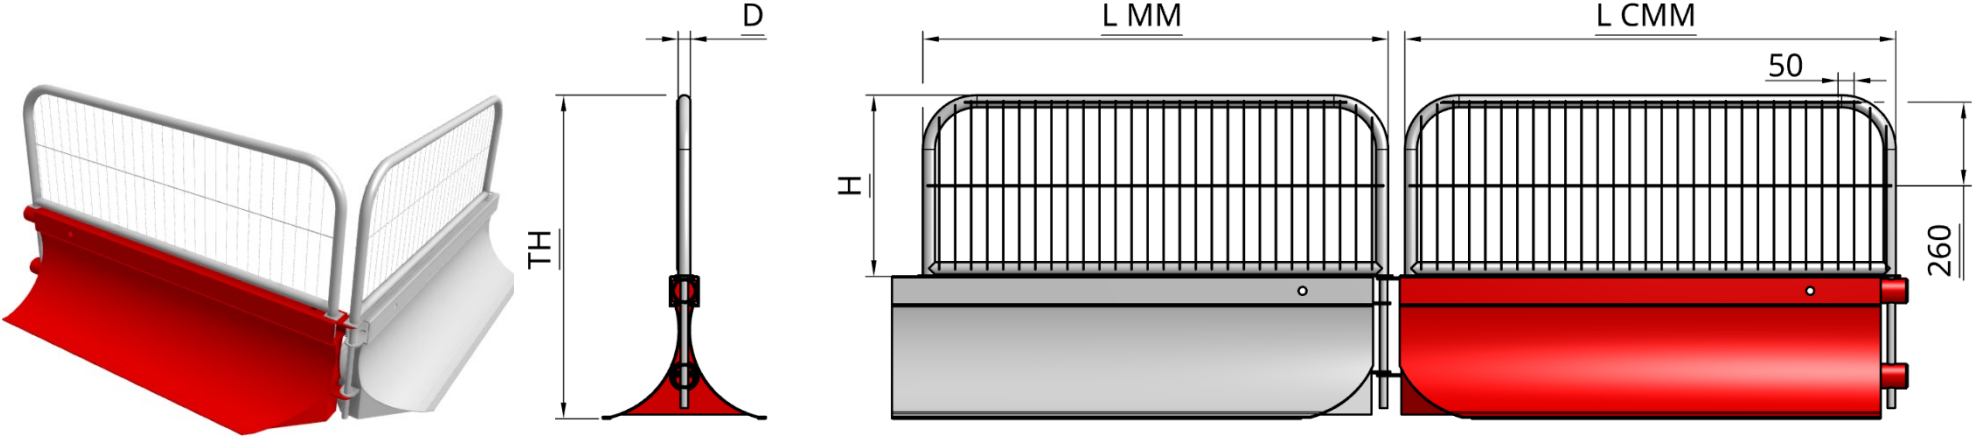

Rugged steel barriers for traffic delineation.

ACCESSORIES

LARGE MESH

CORNER LARGE MESH (Fits male)

PRODUCT CODE 2MFHDHMP

D 38.1MM

L 2954MM

H 1560MM

TH 2003MM

WEIGHT (KG)

PER PALLET

MATERIAL STEEL GALV / POWDER COATED

COLOUR GALV / RED / WHITE

CALCULATED WIND SPEED

38.1MM


3034MM

1560MM

2004MM

STEEL GALV / POWDER COATED

GALV / RED / WHITE

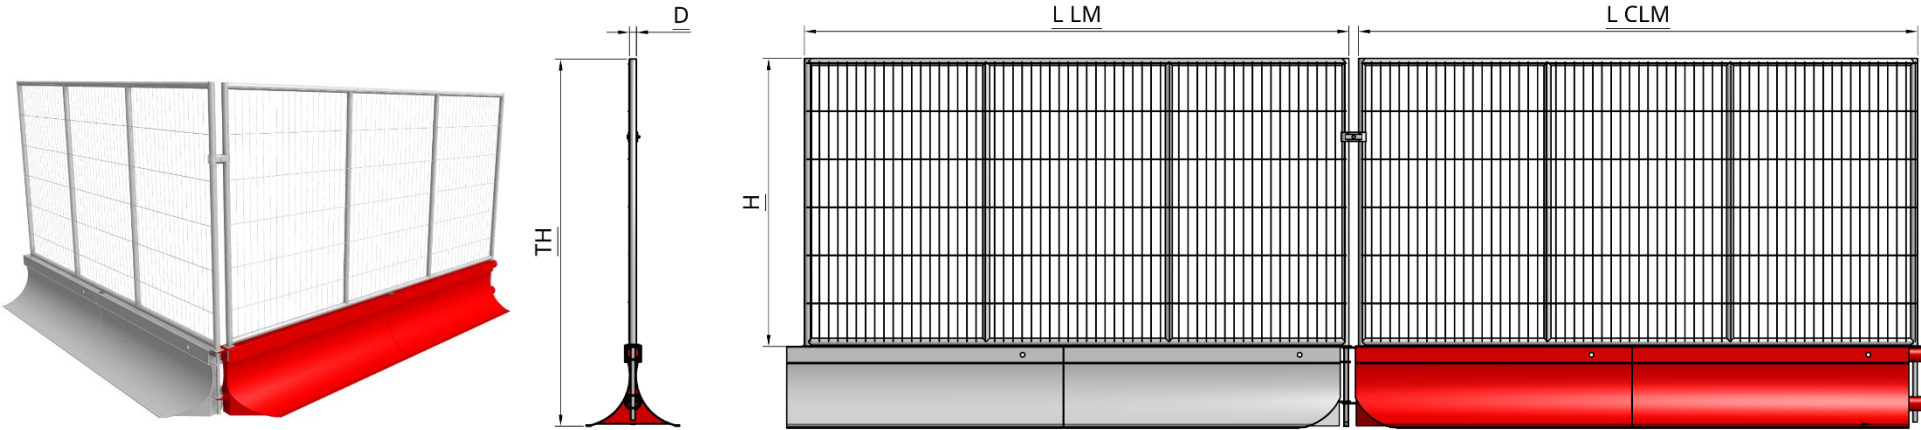

Rugged steel barriers for traffic delineation.

ACCESSORIES

4M VEHICLE GATE

PRODUCT CODE

D 38.1MM

VG SPACE 4231MM

VG L 4038MM

TH 2019MM

FLAG X 1

CLIPS X 6


WEIGHT (KG)

PER PALLET

MATERIAL STEEL GALV / POWDER COATED

COLOUR GALV / RED / WHITE

CALCULATED WIND SPEED

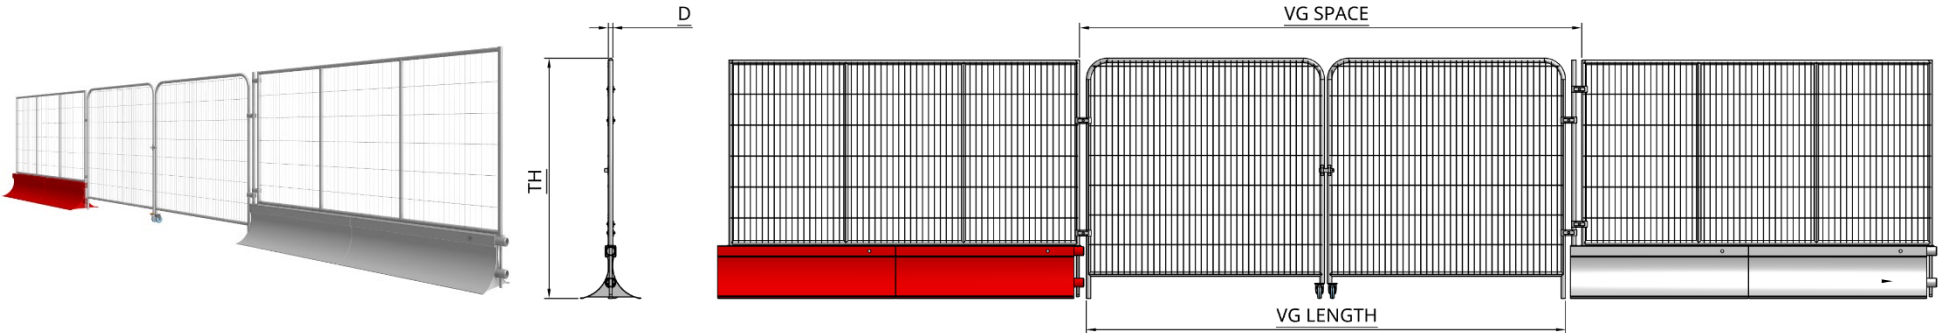

DATA SHEET
8 / 9

Rugged steel barriers for traffic delineation.

ACCESSORIES

PED GATE

PRODUCT CODE

D 38.1MM

PG SPACE 1169MM

PG L 980MM

TH 2068MM

FLAG X 1

CLIPS X 6




WEIGHT (KG)

PER PALLET

MATERIAL STEEL GALV / POWDER COATED

COLOUR GALV / RED / WHITE

CALCULATED WIND SPEED



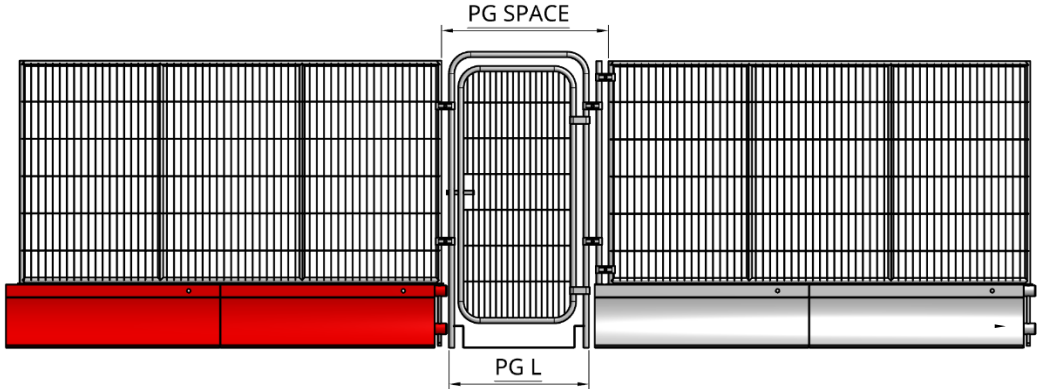

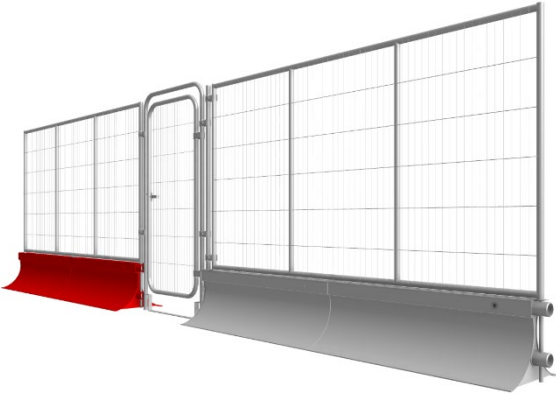


ACCESSORIES

	FORTIS END FEMALE	FORTIS END MALE
PRODUCT CODE	FESTOPF	FESTOPM
WL	510MM	514
W	510MM	510MM
H	443MM	443MM
TL	510MM	587MM
WEIGHT (KG)		
PIN		X 1
PER PALLET	1 X PAIR	1 X PAIR
MATERIAL	STEEL POWDER COATED	STEEL POWDER COATED
COLOUR	WHITE	RED
CALCULATED WIND SPEED		

FEMALE

MALE

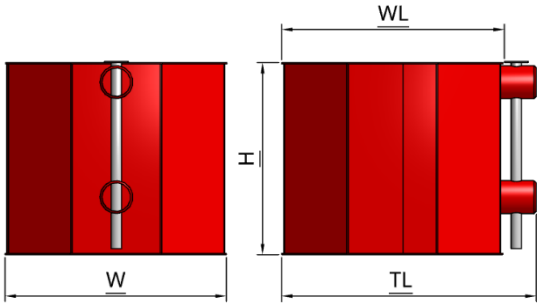

DATA SHEET

WARNING: FAILURE TO FOLLOW THESE GUIDELINES COULD RESULT IN INJURY OR DEATH

Oaklands Group always recommends that a site survey and a full risk assessment must be carried out before using the equipment.

It is the responsibility of the end user to make sure the system is suitable for their intended use. The system must be installed by an experienced and competent person and inspected regularly.

The information provided is for the Oaklands original parts and accessories only, and not valid for non-Oaklands supplied components.

Oaklands cannot be held responsible for the quality or performance of non-Oaklands supplied components.

1. Tipping and sliding values, where provided, are as guide only and It is the customers responsibility to ensure the barrier and fencing system selected is suitable for their specific location.
2. The system should be installed on a flat, level surface.
2. Connecting steel work and fencing systems must be regularly inspected for cracks of faults and replaced if faulty.
3. Connecting steel work fasteners must be regularly inspected for tightness.
4. In unsupported areas such as gates addition ballast may be required