




EN ISO 20345:2022

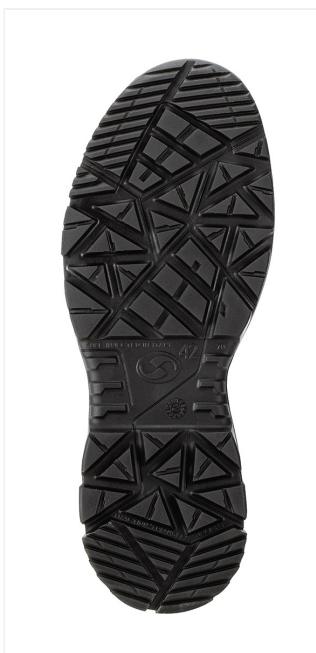

DIVENTURE

BRENNERO BOA®
70534-03L

S3S FO *CI SC LG SR

Size: 36-48
Weight: 740 gr.

Fit: 11

Working Environment:

Building, Wood-metal carpentry,
Oil industry, Farming and
Gardening



FEATURES

UPPER

Greased Nubuk Dakar Leather
Hydro 1,8-2,0 mm

LINING

3D Green Air 320 gr.

ANTISLIP LINING

DUALMICRO

INSOLE

QRS02 Green

TOE CAP

Fiber cap SXT

RESISTANCE TO PERFORATION

KX Antiperforation recycled PS

TYPE

Ankle boot

SOLE

PU DUAL-DENSITY CCYCLED® SR

Two-component PU sole made
from recycled Ccycled® material
with additional LG and SC
requirements and SR
characteristics.

Boa® lace length

M4 - 115cm

TECHNOLOGIES

Removable Insole



Anatomical breathable insole.
Resistant fabric with recycled open-
cell foam that absorbs shocks and
reduces fatigue. Eliminates sweat
with its high ability to evaporate it.
Continuous comfort for months and
months of use



Protection elements



RESISTANT
TO 3.0 mm.
NAILS

fibercap sxt

Composite toecap with fiberglass.
Resistant to over 200J. Recycled non
metal perforation resistant insert to
over 1100 N with a 3.0 mm truncated
cone nail. Protection over the entire
sole of the foot. Flexible and
comfortable



Lateral stability

dynamicControl
technology

Ergonomic rigid structure. It
accommodates the heel, adjusting the
foot support and control of the ankle
in sideways movements. The plastic
material increases protection of the
ankle against sharp or pointy objects.



Torsional stability



STABIL ACTIVE

Support made of rigid plastic
material. It supports the heel bone,
the instep and tarsal joints, without
altering energy absorption. A support
for the natural movement of the foot;
it provides comfort and greater
stability.



Electrical features




ESD footwear discharge static
electricity and avoid damaging
surrounding objects; they are
designed in compliance with the
following standards: IEC EN
61340-5-1:2016 - IEC EN
61340-4-3:2018 - IEC EN
61340-4-5:2018.

Other



**FIT TO GO
FURTHER™**

A patented closing system with a multi
coated stainless steel cable. The
BOA® Fit System delivers micro-
adjustable precision fit, engineered to
perform in the toughest conditions.



PU - PU

SOLE 70

SLIP RESISTANCE

EN ISO 20345:2022

BASIC CERAMIC WITH NALS	FORWARD HEEL SLIP ≥ 0.31	0,39	
	BACKWARD FOREPART SLIP ≥ 0.36	0,42	
SR CERAMIC WITH GLYCERINE	FORWARD HEEL SLIP ≥ 0.19	0,20	
	BACKWARD FOREPART SLIP ≥ 0.22	0,31	