




EN ISO 20345:2022

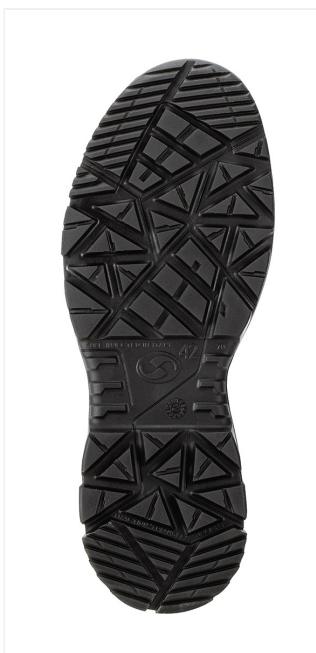

DIVENTURE

**MARMOLADA**
**70539-05L**
**S7S FO \*CI SC LG SR**
**Size:** 36-48

**Weight:** 750 gr.

**Fit:** 11

**Working Environment:**

 Building, Wood-metal carpentry,  
 Oil industry, Farming and  
 Gardening


## FEATURES

### UPPER

 Greased Nubuk Dakar Leather  
 Hydro 1,8-2,0 mm  
 Reflex insert

### LINING

3D Green Air 320 gr.

### ANTISLIP LINING

DUALMICRO

### INSOLE

QRS02 Green

### TOE CAP

Fiber cap SXT

### RESISTANCE TO PERFORATION

KX Antiperforation recycled PS

### TYPE

Ankle boot

### SOLE

#### PU DUAL-DENSITY CCYCLED® SR

 Two-component PU sole made  
 from recycled Cycled® material  
 with additional LG and SC  
 requirements and SR  
 characteristics.

## TECHNOLOGIES

### Removable Insole


 Anatomical breathable insole.  
 Resistant fabric with recycled open-  
 cell foam that absorbs shocks and  
 reduces fatigue. Eliminates sweat  
 with its high ability to evaporate it.  
 Continuous comfort for months and  
 months of use


### Protection elements


 RESISTANT  
 TO 3.0 mm.  
 NAILS

fiber cap sxt

 Composite toecap with fiberglass.  
 Resistant to over 200J. Recycled non  
 metal perforation resistant insert to  
 over 1100 N with a 3.0 mm truncated  
 cone nail. Protection over the entire  
 sole of the foot. Flexible and  
 comfortable


### Lateral stability

 dynamic **HC** control  
 technology

 Ergonomic rigid internal structure. It  
 houses the heel into the right seat,  
 adjusting the foot support and control  
 of the ankle sideways movements. It  
 keeps the foot tight to the shoe,  
 allowing the perfect fit.


### Torsional stability

STABIL•ACTIVE

 Support made of rigid plastic  
 material. It supports the heel bone,  
 the instep and tarsal joints, without  
 altering energy absorption. A support  
 for the natural movement of the foot;  
 it provides comfort and greater  
 stability.


### Electrical features


 ESD footwear discharge static  
 electricity and avoid damaging  
 surrounding objects; they are  
 designed in compliance with the  
 following standards: IEC EN  
 61340-5-1:2016 - IEC EN  
 61340-4-3:2018 - IEC EN  
 61340-4-5:2018.

### Other


 The HDry membrane is hydrophilic  
 with high perspiration capacity. It  
 guarantees high performance and  
 durability, facilitating the  
 maintenance of ideal conditions and  
 comfort for the user.


### PU - PU

SOLE 70

### SLIP RESISTANCE

EN ISO 20345:2022

#### BASIC CERAMIC WITH NALS

|                                     |      |  |
|-------------------------------------|------|--|
| FORWARD<br>HEEL SLIP<br>≥ 0.31      | 0,39 |  |
| BACKWARD<br>FOREPART SLIP<br>≥ 0.36 | 0,42 |  |

#### SR CERAMIC WITH GLYCERINE

|                                     |      |  |
|-------------------------------------|------|--|
| FORWARD<br>HEEL SLIP<br>≥ 0.19      | 0,20 |  |
| BACKWARD<br>FOREPART SLIP<br>≥ 0.22 | 0,31 |  |