

PERFECT BOLLARD WITH ZERO MAINTENANCE FOR TRAFFIC AND COMMERCIAL APPLICATION

A non-illuminated and passively safe bollard designed and tested to be fully compliant to BS EN 12767:2019 for use on the UK highway. The Dynaflex bollard is available in many variants.

- Full 360° visibility
- Easy to install & highly durable
- Reflective sign face with a 12 year warranty
- 100% Recyclable shell
- BS 8442:2015 compliant
- All reflective material meets BS 8408:2005
- Independently tested




The Dynaflex bollard is made from rotationally moulded polyethylene, the non-illuminated sign face can be overlaid with any regulatory traffic sign for on highway, or any commercial design for car parks and business sites and various other applications.

Dynaflex represents the very latest generation of self righting bollards. Dynaflex self righting bollards are designed to enhance motorist safety, providing a cost effective solution to bollard damage due to vehicle impact. Ideal for locations where there is a high probability of vehicle impact such as splitter islands at roundabouts, traffic calming and car parks. As Dynaflex bollards can survive repeated multiple vehicle impacts, it significantly reduces the need for repeat visits to site to replace damaged bollards. Dynaflex bollards return to their original orientation after impact, this helps ensure that their performance as a road safety device is not affected and allows it to continue to do its job.





INSTALLATION

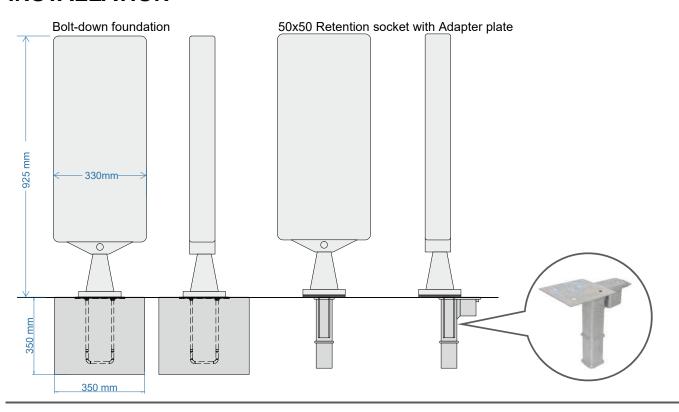



VERSATILE INSTALLATION AND ZERO MAINTENANCE

Foundation Cage



Adapter plate



Retention socket



SPECIFICATIONS DETAILS	
Material	Rotationally moulded polyethylene
Colour	Black
Protection	Recessed reflective panels & anti-vandal fixings
Corrosive Resistance	SP1/SP2
Installation Options	Foundation cage, retention socket or adapter plate
Reflective Material	Fully compliant with Class R3B, EN12899-1:2007
Sign Face	300mm (single or double sided)
Front Reflector	310 x 725 mm
Rear Reflector	80 x 566 mm (x 2)
Side Reflector	80 x 566 (x 2)
BS8442:2015	Fully compliant
Warranty	12 year Delamination warranty 3 years Manufacturer's warranty
Recyclable	Yes















