
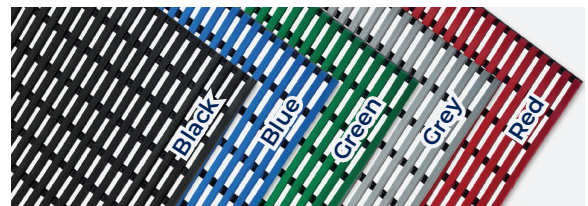


Interflex


Interflex is the ultimate multi-use slip resistant mat designed to withstand extensive foot traffic. Interflex can be used in wet areas such as swimming pools, changing and various other sport and leisure facilities, along with industrial, construction and catering establishments where slip hazards exist. The strong, non-porous PVC with channelled underbars automatically self-drain even when faced with large amount of water, oil, grease, or chemicals. The mats embossed surface provides exceptional grip whilst the anti-microbial and anti-fungal additives ensures excellent hygiene. Interflex also offers excellent sound absorption properties. Connector clips are available for side or end joining to create the perfect shape or fit.

Features

- ◆ **Typical applications:** Perfect for all wet environments including industrial sites, swimming pools and therapeutic baths, changing rooms, health resort facilities, hospitals, restrooms, workplaces, kitchens and catering facilities plus, industrial and construction establishments where free draining flooring is needed.
- ◆ **Material:** Flexible PVC.
- ◆ **Cleaning:** Regular cleaning will maintain both the effectiveness and lifespan of Interflex. Interflex can be hand cleaned, machine and steam cleaned. When using Interflex for barefoot activity, or when used in Catering environments, we recommend using an alkaline cleaning fluid.
- ◆ **Sustainability:** 100% recyclable material. REACH compliant.
- ◆ **Warranty:** Lifetime.

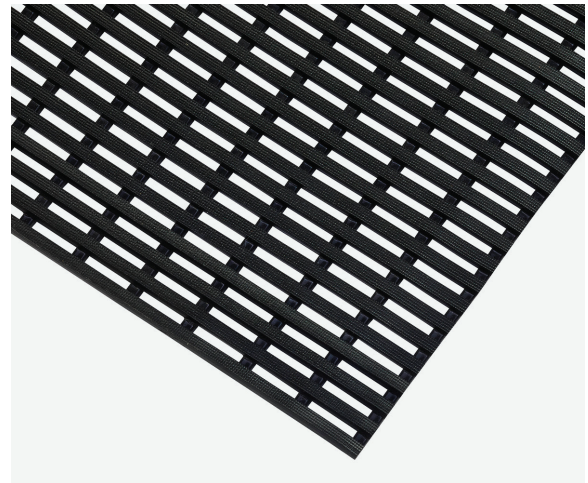

For more information about this product or, to place an order [click here](#)

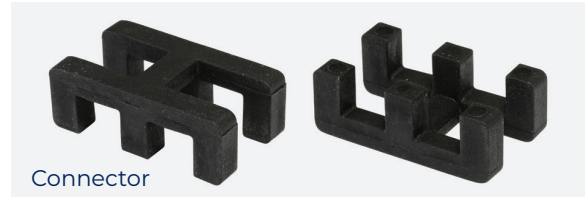

Code	Metric	Imperial	Thickness	Weight	Type	Colour
IF2433BL	60cm x 10m	2' x 33'	11mm	33kg	Roll	Black
IF2433BU	60cm x 10m	2' x 33'	11mm	33kg	Roll	Blue
IF2433GN	60cm x 10m	2' x 33'	11mm	33kg	Roll	Green
IF2433GY	60cm x 10m	2' x 33'	11mm	33kg	Roll	Grey

Interflex

Code	Metric	Imperial	Thickness	Weight	Type	Colour
IF2433RD	60cm x 10m	2' x 33'	11mm	33kg	Roll	Red
IF3233BL	80cm x 10m	3' x 33'	11mm	44kg	Roll	Black
IF3233BU	80cm x 10m	3' x 33'	11mm	44kg	Roll	Blue
IF3233GN	80cm x 10m	3' x 33'	11mm	44kg	Roll	Green
IF3233GY	80cm x 10m	3' x 33'	11mm	44kg	Roll	Grey
IF3233RD	80cm x 10m	3' x 33'	11mm	44kg	Roll	Red
IF3933BL	100cm x 10m	3' x 33'	11mm	55kg	Roll	Black
IF3933BU	100cm x 10m	3' x 33'	11mm	55kg	Roll	Blue
IF3933GN	100cm x 10m	3' x 33'	11mm	55kg	Roll	Green
IF3933GY	100cm x 10m	3' x 33'	11mm	55kg	Roll	Grey
IF3933RD	100cm x 10m	3' x 33'	11mm	55kg	Roll	Red
IF4733BL	120cm x 10m	4' x 33'	11mm	70kg	Roll	Black
IF4733BU	120cm x 10m	4' x 33'	11mm	70kg	Roll	Blue
IF4733GN	120cm x 10m	4' x 33'	11mm	70kg	Roll	Green
IF4733GY	120cm x 10m	4' x 33'	11mm	70kg	Roll	Grey
IF4733RD	120cm x 10m	4' x 33'	11mm	70kg	Roll	Red
IF24BL	60cm wide	2' wide	11mm	4.3kg	Cut length - per m	Black
IF24BU	60cm wide	2' wide	11mm	4.3kg	Cut length - per m	Blue
IF24GN	60cm wide	2' wide	11mm	4.3kg	Cut length - per m	Green
IF24GY	60cm wide	2' wide	11mm	4.3kg	Cut length - per m	Grey
IF24RD	60cm wide	2' wide	11mm	4.3kg	Cut length - per m	Red
IF32BL	80cm wide	3' wide	11mm	5.7kg	Cut length - per m	Black
IF32BU	80cm wide	3' wide	11mm	5.7kg	Cut length - per m	Blue
IF32GN	80cm wide	3' wide	11mm	5.7kg	Cut length - per m	Green
IF32GY	80cm wide	3' wide	11mm	5.7kg	Cut length - per m	Grey
IF32RD	80cm wide	3' wide	11mm	5.7kg	Cut length - per m	Red

Interflex

Code	Metric	Imperial	Thickness	Weight	Type	Colour
IF39BL	100cm wide	3' wide	11mm	7.2kg	Cut length - per m	Black
IF39BU	100cm wide	3' wide	11mm	7.2kg	Cut length - per m	Blue
IF39GN	100cm wide	3' wide	11mm	7.2kg	Cut length - per m	Green
IF39GY	100cm wide	3' wide	11mm	7.2kg	Cut length - per m	Grey
IF39RD	100cm wide	3' wide	11mm	7.2kg	Cut length - per m	Red
IF47BL	120cm wide	4' wide	11mm	8.6kg	Cut length - per m	Black
IF47BU	120cm wide	4' wide	11mm	8.6kg	Cut length - per m	Blue
IF47GN	120cm wide	4' wide	11mm	8.6kg	Cut length - per m	Green
IF47GY	120cm wide	4' wide	11mm	8.6kg	Cut length - per m	Grey
IF47RD	120cm wide	4' wide	11mm	8.6kg	Cut length - per m	Red
IFC	30mm x 20mm	1" x 1"	10mm	0.01kg	Connector	Black

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

Technical Specification

Slip resistant:	Great slip resistance to level 2
Anti-fatigue:	Great anti-fatigue properties, resistant to level 2
Wear resistant:	Excellent wear resistance to level 3, suitable for heavy footfall
Water absorbent:	The two-layer construction and channelled underbars allows water to self-drain
Anti-microbial:	Yes, anti-microbial and anti-fungal additives ensure excellent hygiene
Chemical resistant:	Yes, resistant to most acids, alkaline and oils
Connectable:	Yes, mats are connectable to create any shape or fit
Cut to length:	Yes, mat can be cut to length. Interflex also contours to uneven surfaces
Dry area:	Yes
Wet area:	Yes
Oily and greasy area:	Yes
Environment:	Suitable for indoor and outdoor use

Interflex

Technical Specification

Flame retardant: Yes

Product testing:

- ◆ Slip Resistance - DIN 51097: Classification C
- ◆ ASTM F 1677 - Dry/Wet: 0.9/0.7
- ◆ Fire: EN13501-1 : 2007 - Cfl - S1

Sustainability:

- ◆ 100% recyclable material
- ◆ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)

Temperature resistance: -23°C to +60°C

UV resistant: Yes, resistance to PVC degradation

Cleaning:

Regular cleaning will maintain both the effectiveness and lifespan of Interflex. Interflex can be hand cleaned and machine and steam cleaned. When using Interflex for bear foot activity, or when used in Catering environments, we recommend using an alkaline cleaning fluid