

Interlocking Gym Mat

Our interlocking gym mat is an extremely durable, loose-lay interlocking floor tile perfect for comfort and safety in gymnasiums and weight training areas. The flat, textured surface allows for great stability whilst the bevel edges eliminate trip hazards. Made from 100% rubber, our heavy duty mat protects equipment from damage, absorbs shock, and reduces noise levels. The modular format, consisting of centre, corner and edge tiles, means the mat can be fitted into any area, size or shape and can be easily relocated if needed.

Features


- ◆ **Typical applications:** Perfect for gymnasiums and weight training areas plus ice skating arenas and other sporting venues.
- ◆ **Material:** Natural and recycled rubber.
- ◆ **Cleaning:** Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of harsh detergents is not recommended.
- ◆ **Sustainability:** Nature friendly, biodegradable and recyclable. REACH compliant. Contributes to a cleaner environment by reducing the need to use cleaning chemicals.
- ◆ **Warranty:** Lifetime.



Suitable for indoor use



For more information about this product or, to place an order [click here](#)

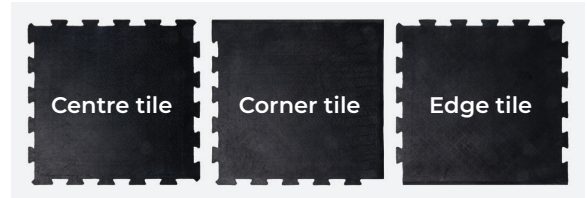

Code	Metric	Imperial	Thickness	Weight	Type	Colour
GT2424	60cm x 60cm	2' x 2'	10mm	5kg	Centre tile	Black
GTC2424	60cm x 60cm	2' x 2'	10mm	5kg	Corner tile	Black
GTE2424	60cm x 60cm	2' x 2'	10mm	5kg	Edge tile	Black

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

Interlocking Gym Mat

Technical Specification

Slip resistant: Great slip resistance to level 2

Anti-fatigue: Good anti-fatigue properties, resistant to level 1

Wear resistant: Excellent wear resistance to level 3, suitable for heavy footfall

Connectable: Yes, mats are connectable to create any shape or size

Disability friendly: Yes, the low profile makes it suitable for wheelchair users

Dry area: Yes

Heavy area: Yes

Environment: Suitable for indoor use

Impact resistant: Yes

Product testing:

- ◆ Tensile strength: 3-3.5 Mpa
- ◆ Hardness: 55+ Shore A
- ◆ DIN abrasion loss mm³: 250-300
- ◆ Elongation at break: 200-250%
- ◆ Minimum resistance to salt water and oil

Sustainability:

- ◆ Nature friendly, biodegradable and recyclable
- ◆ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)
- ◆ Contributes to a cleaner environment by reducing the need to use cleaning chemicals

Temperature resistance: -20°C to +130°C

Cleaning: Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of harsh detergents is not recommended