

R-XPTIII-ZP THROUGHBOLT FOR UNCRACKED CONCRETE

Zinc Plated throughbolt for uncracked concrete



FEATURES AND BENEFITS

High performance in non-cracked concrete confirmed by ETA Option 7.

Optimized cone shape, increasing the rake angle floor straps.

The new shape of the expansion band with an innovative ring at the end of the band ensures a perfect connection between the anchor and the ground.

Application specification in accordance with EAD 330232-01-0601-v01 and included in ETA-23/0887.

Identification mark of anchor length, facilitating control after installation.

Polish production guarantees the highest precision of workmanship and its repeatability.

Quick and comfortable assembly using an SDS punch.

Possibility of installation near the edge of concrete and at short distances from adjacent screws.

SUBSTRATES



Non-cracked concrete C20/25-C50/60



Unreinforced concrete



Reinforced concrete





APPLICATIONS

Barriers


Handrails

Poles and road signs

Seats in public facilities

Steel structures

Ventilated facades

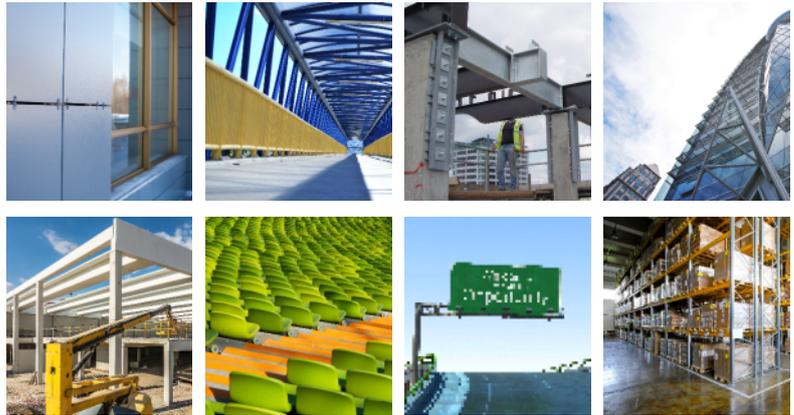


INSTALLATION GUIDE



1. Drill a hole of required diameter and depth.
2. Clear the hole of drilling dust and debris (using blowpump or equivalent method).
3. Lightly tap the anchor through the fixture into hole with hammer, until fixing depth is reached.
4. Insert bolt through fixture and tighten to the recommended torque.

INSTALLATION DATA

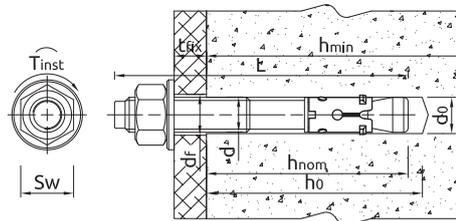

			8	10	12	16	20
Thread diameter	d	[mm]	8	10	12	16	20
Hole diameter in substrate	d ₀	[mm]	8	10	12	16	20
Hole diameter in fixture	d _f	[mm]	9	12	14	18	22
Installation torque	T _{inst}	[Nm]	15	30	50	100	200
Wrench size	Sw	[mm]	13	17	19	24	30
Min. spacing	s _{min,r}	[mm]	35	50	70	90	120
Min. edge distance	c _{min,r}	[mm]	40	50	70	90	120
STANDARD EMBEDMENT DEPTH							
Min. hole depth in substrate	h _{0,s}	[mm]	60	65	90	110	126
Min. installation depth	h _{nom,s}	[mm]	55	60	80	100	116
Min. substrate thickness	h _{min,s}	[mm]	100	100	102	128	150
REDUCED EMBEDMENT DEPTH							
Min. hole depth in substrate	h _{0,r}	[mm]	45	55	70	90	106
Min. installation depth	h _{nom,r}	[mm]	40 ¹⁾	50	60	80	96
Min. substrate thickness	h _{min,r}	[mm]	100	100	100	100	120

¹⁾ Use restricted to anchoring statically indeterminate structural components

MECHANICAL PROPERTIES

			M8	M10	M12	M16	M20
Nominal ultimate tensile strength - tension	f _{uk}	[N/mm ²]	600	600	600	600	600
Nominal yield strength	f _{yk}	[N/mm ²]	480	480	480	480	480
Cross sectional area	A _s	[mm ²]	36,6	58,0	84,3	157	245
Elastic section modulus	W _{el}	[mm ³]	50,3	98,2	169,6	402,1	785,4
Characteristic bending resistance	M ⁰ _{Rk,s}	[Nm]	33,5	66,5	116,1	278,8	548,7
Design bending resistance	M	[Nm]	26,8	53,2	92,8	223,0	439,0

BASIC PERFORMANCE DATA

Performance data for single anchor without influence of edge distance and spacing

	Size		M8	M10	M12	M16	M20
Standard embedment depth	h _{nom}	[mm]	55	60	80	100	116
Reduced embedment depth	h _{nom}	[mm]	40 ¹⁾	50	60	80	96
MEAN ULTIMATE RESISTANCE							
TENSION LOAD							

R-XPTIII-ZP THROUGHBOLT FOR UNCRACKED CONCRETE

Size			M8	M10	M12	M16	M20
UNCRACKED CONCRETE							
Standard embedment depth	$N_{Ru,m}$	[kN]	18,38	23,50	37,85	52,90	67,50
Reduced embedment depth	$N_{Ru,m}$	[kN]	12,22	17,08	22,45	35,37	48,30
SHEAR LOAD							
UNCRACKED CONCRETE							
Standard embedment depth	$V_{Ru,m}$	[kN]	11,99	19,14	22,44	46,20	80,85
Reduced embedment depth	$V_{Ru,m}$	[kN]	11,99	17,08	22,44	46,20	80,85
CHARACTERISTIC RESISTANCE							
TENSION LOAD							
UNCRACKED CONCRETE							
Standard embedment depth	N_{Rk}	[kN]	15,00	17,39	27,58	38,55	49,19
Reduced embedment depth	N_{Rk}	[kN]	8,50	12,45	16,36	25,78	35,20
SHEAR LOAD							
UNCRACKED CONCRETE							
Standard embedment depth	V_{Rk}	[kN]	10,90	17,39	20,40	42,00	73,50
Reduced embedment depth	V_{Rk}	[kN]	8,90	12,45	16,36	42,00	70,40
DESIGN RESISTANCE							
TENSION LOAD							
UNCRACKED CONCRETE							
Standard embedment depth	N_{Rd}	[kN]	10,00	11,60	18,39	25,70	32,80
Reduced embedment depth	N_{Rd}	[kN]	5,67	8,30	10,91	17,19	23,47
SHEAR LOAD							
UNCRACKED CONCRETE							
Standard embedment depth	V_{Rd}	[kN]	8,72	11,60	16,32	33,60	58,80
Reduced embedment depth	V_{Rd}	[kN]	5,94	8,30	10,91	33,60	46,93
RECOMMENDED LOAD							
TENSION LOAD							
UNCRACKED CONCRETE							
Standard embedment depth	N_{rec}	[kN]	7,14	8,28	13,14	18,36	23,43
Reduced embedment depth	N_{rec}	[kN]	4,05	5,93	7,79	12,28	16,76
SHEAR LOAD							
UNCRACKED CONCRETE							
Standard embedment depth	V_{rec}	[kN]	6,23	8,28	11,66	24,00	42,00
Reduced embedment depth	V_{rec}	[kN]	4,24	5,93	7,79	24,00	33,52

¹⁾ Use restricted to anchoring statically indeterminate structural components

DESIGN PERFORMANCE DATA

Static loads

Size			M8	M8	M10	M10	M12	M12	M16	M16	M20	M20
Nominal embedment depth	h_{nom}	[mm]	40	55	50	60	60	80	80	100	96	116
Effective embedment depth	h_{ef}	[mm]	32 ¹⁾	47	40	50	48	68	65	85	80	100
TENSION LOAD												
STEEL FAILURE												
Characteristic resistance	$N_{Rk,s}$	[kN]	17,5	17,5	27,6	27,6	40,0	40,0	71,1	71,1	108,1	108,1
Partial safety factor	γ_{MS}	[-]	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
PULL-OUT FAILURE												
Characteristic resistance in uncracked concrete C20/25	$N_{Rk,pucr}$	[kN]	8,5	15,0	18,0	18,0	32,0	32,0	50,0	50,0	80	80
Installation safety factor	γ_{inst}	[-]	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0
Increasing factors for concrete C30/37	ψ_c	[-]	1,22	1,22	1,22	1,22	1,22	1,22	1,22	1,22	1,22	1,22
Increasing factors for concrete C40/50	ψ_c	[-]	1,41	1,41	1,41	1,41	1,41	1,41	1,41	1,41	1,41	1,41
Increasing factors for concrete C50/60	ψ_c	[-]	1,56	1,56	1,56	1,56	1,56	1,56	1,56	1,56	1,56	1,56
CONCRETE CONE FAILURE												
Factor for uncracked concrete	$k_{suz,N}$	[-]	11,0	11,0	11,0	11,0	11,0	11,0	11,0	11,0	11,0	11,0
Installation safety factor	γ_{inst}	[-]	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0
Spacing	$s_{cr,N}$	[mm]	96,0	141,0	120,0	150,0	144,0	204,0	195,0	255,0	240,0	300,0
Edge distance	$c_{cr,N}$	[mm]	48,0	70,5	60,0	75,0	72,0	102,0	97,5	127,5	120,0	150,0
SHEAR LOAD												
STEEL FAILURE												
Characteristic resistance without lever arm	$V_{Rk,s}^0$	[kN]	10,9	10,9	17,4	17,4	20,4	20,4	42,0	42,0	73,5	73,5
Ductility factor	k_γ	[-]	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	33,5	33,5	66,5	66,5	116,1	116,1	278,8	278,8	548,7	548,7
Partial safety factor	γ_{MS}	[-]	1,25	1,25	1,25	1,25	1,25	1,25	1,25	1,25	1,25	1,25
CONCRETE PRY-OUT FAILURE												
Factor	k	[-]	1,0	1,0	1,0	1,0	1,0	2,0	2,0	2,0	2,0	2,0
Installation safety factor	γ_{inst}	[-]	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0
CONCRETE EDGE FAILURE												
Effective length of anchor	ℓ_f	[mm]	32	47	40	50	48	68	65	85	80	100
Anchor diameter	d_{nom}	[mm]	8	8	10	10	12	12	16	16	20	20
Installation safety factor	γ_{inst}	[-]	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0

¹⁾ Use restricted to anchoring statically indeterminate structural components

LOGISTICAL DATA

SKU	Base-sales unit	Unit pack	Bulk pack	Pallet	Single Package - Gross Weight	Bulk Package - Gross Weight	Palette - Gross Weight	Barcode
R-XPTIII-ZP08060/10	pcs.	100.0	100.0	39200.0	2.7	2.7	1077.6	5906675534558
R-XPTIII-ZP08075/25	pcs.	100.0	100.0	16000.0	3.1	3.1	499.2	5906675534565
R-XPTIII-ZP08085/35	pcs.	100.0	100.0	39200.0	3.3	3.3	1292.0	5906675534572
R-XPTIII-ZP08095/45	pcs.	100.0	100.0	12000.0	3.7	3.7	444.0	5906675534589
R-XPTIII-ZP08115/65	pcs.	100.0	100.0	12000.0	4.4	4.4	532.8	5906675534596
R-XPTIII-ZP08150/100	pcs.	100.0	100.0	12000.0	5.2	5.2	838.4	5906675534602
R-XPTIII-ZP10065/5	pcs.	50.0	50.0	19600.0	2.4	2.4	940.0	5906675534619
R-XPTIII-ZP10080/20	pcs.	50.0	50.0	8000.0	2.9	2.9	457.6	5906675534626
R-XPTIII-ZP10095/35	pcs.	50.0	50.0	19600.0	3.2	3.2	617.6	5906675534633
R-XPTIII-ZP10115/55	pcs.	50.0	50.0	19600.0	1.8	1.8	722.3	5906675534640
R-XPTIII-ZP10130/70	pcs.	50.0	50.0	8000.0	2.1	2.1	656.0	5906675534657
R-XPTIII-ZP10140/80	pcs.	50.0	50.0	19600.0	2.2	2.2	854.8	5906675534664
R-XPTIII-ZP10150/90	pcs.	50.0	50.0	8000.0	4.5	4.5	712.0	5906675645735
R-XPTIII-ZP10180/120	pcs.	50.0	50.0	6000.0	2.4	2.4	726.0	5906675534671
R-XPTIII-ZP12080/5	pcs.	50.0	50.0	19600.0	4.2	4.2	1603.3	5906675534688
R-XPTIII-ZP12100/25	pcs.	50.0	50.0	19600.0	2.4	2.4	942.4	5906675534695
R-XPTIII-ZP12120/45	pcs.	50.0	50.0	19600.0	2.8	2.8	1090.9	5906675534718
R-XPTIII-ZP12135/60	pcs.	50.0	50.0	19600.0	3.1	3.1	1227.7	5906675534725
R-XPTIII-ZP12150/75	pcs.	50.0	50.0	19600.0	3.3	3.3	1308.3	5906675534732
R-XPTIII-ZP12180/105	pcs.	50.0	50.0	19600.0	3.9	3.9	1533.5	5906675534749
R-XPTIII-ZP12200/125	pcs.	50.0	50.0	4000.0	8.3	8.3	667.4	5906675534756
R-XPTIII-ZP12220/145	pcs.	50.0	50.0	4000.0	0.0	0.0	0.0	5906675534763
R-XPTIII-ZP12250/175	pcs.	50.0	50.0	3000.0	10.1	10.1	808.6	5906675534770
R-XPTIII-ZP12280/205	pcs.	50.0	50.0	1600.0	0.0	0.0	0.0	5906675534787
R-XPTIII-ZP16105/5	pcs.	25.0	25.0	4000.0	0.0	0.0	0.0	5906675534794
R-XPTIII-ZP16125/25	pcs.	25.0	25.0	4000.0	0.0	0.0	0.0	5906675534800
R-XPTIII-ZP16140/40	pcs.	25.0	25.0	4000.0	5.7	5.7	911.7	5906675534817
R-XPTIII-ZP16150/50	pcs.	25.0	25.0	4000.0	6.1	6.1	977.0	5906675649566
R-XPTIII-ZP16160/60	pcs.	25.0	25.0	3000.0	6.4	6.4	764.6	5906675534824

LOGISTICAL DATA

SKU	Base-sales unit	Unit pack	Bulk pack	Pallet	Single Package - Gross Weight	Bulk Package - Gross Weight	Palette - Gross Weight	Barcode
R-XPTIII-ZP16180/80	pcs.	25.0	25.0	3000.0	7.0	7.0	843.8	5906675534831
R-XPTIII-ZP16200100	pcs.	25.0	25.0	3000.0	7.6	7.6	913.8	5906675534848
R-XPTIII-ZP16220120	pcs.	25.0	25.0	3000.0	0.0	0.0	0.0	5906675534855
R-XPTIII-ZP16250150	pcs.	25.0	25.0	2000.0	9.3	9.3	742.9	5906675534862
R-XPTIII-ZP16280180	pcs.	15.0	15.0	1200.0	0.0	0.0	0.0	5906675534879
R-XPTIII-ZP16300200	pcs.	10.0	10.0	1560.0	0.0	0.0	0.0	5906675534886
R-XPTIII-ZP20125/5	pcs.	25.0	25.0	3000.0	8.4	8.4	1003.2	5906675534893
R-XPTIII-ZP20160/40	pcs.	25.0	25.0	2000.0	10.2	10.2	817.6	5906675534909
R-XPTIII-ZP20200/80	pcs.	10.0	10.0	1200.0	0.0	0.0	0.0	5906675534916
R-XPTIII-ZP20250130	pcs.	10.0	10.0	1200.0	0.0	0.0	0.0	5906675534923
R-XPTIII-ZP20300180	pcs.	10.0	10.0	800.0	0.0	0.0	0.0	5906675534930

RELATED PRODUCTS

SAFETY	Protective gloves for power tools R-PGL 			
DRILLING	Rotary Hammer Drill SDS plus; 850W; 26mm; 2.5J R-PRH-26850 	Cordless RawlHammer 18V SDS plus R-PRH18-S 	Drill bits Aggressor SDS plus RT-SDSA 	Drill bits Rebardrill SDS plus RT-SDSR 
CLEANING	Blow Pump R-BLOWPUMP 			
ANCHORING	Hammer RT-HAM-0500 	Long impact sockets RT-IS 	Torque wrench RT-RW-20-400 	MECHANICAL ANCHOR SETTING TOOL SDS PLUS RT-SDSI-MA 