

SiteMat


SiteMat offers a cost-effective solution for anti-slip protection. This versatile, durable, and lightweight walkway surface provides exceptional non-directional grip, due to its diamond-embossed chequer plate pattern. Its eye-catching bright yellow colour also ensures high visibility in areas where safety is paramount, making it an ideal choice for construction sites, industrial settings, and other high-traffic environments.

Features

- ◆ **Typical applications:** Ideal for enhancing safety and visibility in construction site walkways and other high-traffic areas.
- ◆ **Material:** 100% PVC.
- ◆ **Cleaning:** Wash with cold water. Can use a pressure pump to remove dirt.
- ◆ **Sustainability:** Nature friendly, biodegradable and recyclable. REACH compliant. Contributes to a cleaner environment by reducing the need to use cleaning chemicals.
- ◆ **Warranty:** Lifetime.



Suitable for indoor and outdoor use

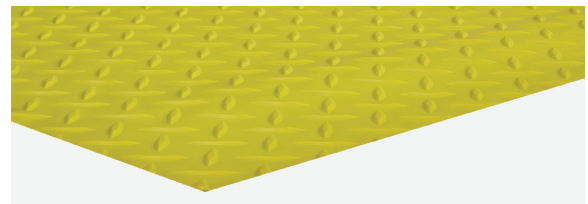

For more information about this product or, to place an order [click here](#)

Code	Metric	Imperial	Thickness	Weight	Type	Colour
CR2100-1YL	100cm x 10m	4' x 33'	2mm	35kg	Roll	Yellow

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

SiteMat

Technical Specification

Slip resistant:	Excellent slip resistance to level 3
Wear resistant:	Excellent wear resistance to level 3, suitable for heavy footfall
Water absorbent:	Great water absorbency to level 2
Crush resistant:	Great crush resistance to level 2
Disability friendly:	Yes, the low profile makes it suitable for wheelchair users
Dry area:	Yes
Wet area:	Yes
Wheeled area:	Yes, the low profile allows easy access for lightweight wheeled traffic
Environment:	Suitable for indoor and outdoor use
Impact resistant:	Yes

Product testing:	◆ Hardness: 85+/-5 shore A - DIN ISO 7619-1
	◆ Volume weight: 1.82g/cm ³ - DIN 53504
	◆ Tensile strength: Direction 1 - 1690psi/direction 2 - 1940psi ASTM D412-16
	◆ Elongation at break: 190% - ASTM D3574-17 Test E
	◆ Puncture resistance - EN388:2016+A1:2028, Clause 6.5
	◆ Indentation resistance - ASTM F970-17

Sustainability:	◆ Nature friendly, biodegradable and recyclable
	◆ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)
	◆ Contributes to a cleaner environment by reducing the need to use cleaning chemicals

Temperature resistance:	-10°C to +65°C
-------------------------	----------------