


Wide Rib Rubber


Wide Rib Rubber is a low cost, surface covering suitable for a wide variety of applications. The wide ribbed surface provides excellent grip for both floor surfaces and work areas. It is easy to cut and can be laid loose or glued/ fixed down for a more permanent solution. Available in two different thicknesses: 3mm and 6mm and two widths: 90cm and 120cm, it can be ordered in 10m rolls or by cut lengths. Wide Rib Rubber is suitable for medium to heavy duty use.

Features

- ◆ **Typical applications:** Low-cost surface covering, suitable for industrial flooring, aisles, work benches, vehicle interiors, kennels, livery enclosures and animal grooming areas.
- ◆ **Material:** 100% rubber.
- ◆ **Cleaning:** Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of harsh detergents is not recommended.
- ◆ **Sustainability:** REACH compliant. Contributes to a cleaner environment by reducing the need to use cleaning chemicals.
- ◆ **Warranty:** Lifetime.

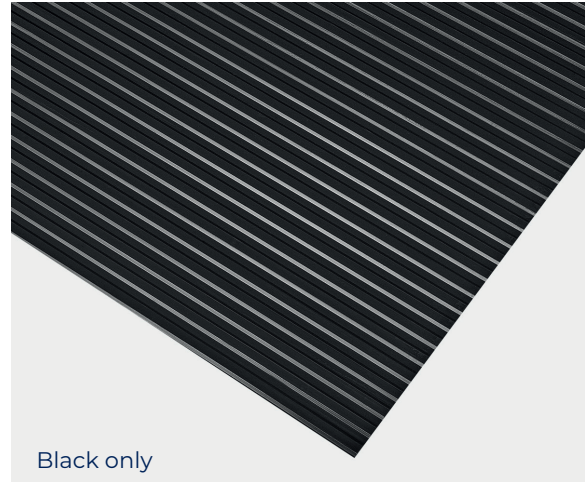

Suitable for indoor and outdoor use

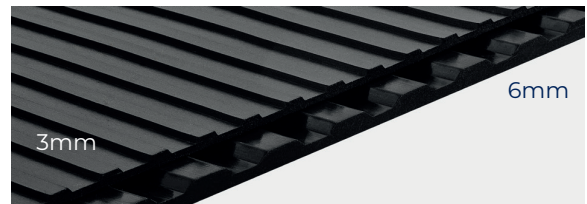

For more information about this product or, to place an order [click here](#)

Code	Metric	Imperial	Thickness	Weight	Type	Colour
WR391	90cm x 10m	3' x 33'	3mm	33.75kg	Roll	Black
WR691	90cm x 10m	3' x 33'	6mm	74.25kg	Roll	Black
WR3122	120cm x 10m	4' x 33'	3mm	45kg	Roll	Black
WR6122	120cm x 10m	4' x 33'	6mm	99kg	Roll	Black
WR391C	90cm wide	3' wide	3mm	3.38kg	Cut length - per m	Black
WR691C	90cm wide	3' wide	6mm	7.43kg	Cut length - per m	Black
WR3122C	120cm wide	4' wide	3mm	4.5kg	Cut length - per m	Black
WR6122C	120cm wide	4' wide	6mm	9.9kg	Cut length - per m	Black

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number
 Please note, the thickness can be +/- 0.3 to 0.5mm. Roll tolerance - width and length +/- 2%

Wide Rib Rubber

Technical Specification

Slip resistant:	Great slip resistance to level 2
Anti-fatigue:	Good anti-fatigue properties, resistant to level 1
Wear resistant:	Great wear resistance to level 2, suitable for medium to high footfall
Cut to length:	Yes, mat can be cut to length
Cut to size:	Yes, mat can be cut to bespoke sizes
Disability friendly:	Yes, the low profile makes it suitable for wheelchair users
Dry area:	Yes
Wheeled area:	Yes, the low profile allows easy access for lightweight wheeled traffic
Impact resistant:	Yes
Environment:	Suitable for indoor and outdoor use
Product testing:	<ul style="list-style-type: none">◆ Hardness Shore A ± 5 70° - ISO 7619-1◆ SG (g/cm²) 1.5 - ISO 2781◆ Tensile (N/mm²) 3.5 - ISO 37◆ Elongation % 300 - ISO 37◆ Compression % 43 - ISO 37◆ Tear Strength 12 - ISO 34-1◆ Abrasion mm³ 480 - ISO 37
Sustainability:	<ul style="list-style-type: none">◆ REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals)◆ Contributes to a cleaner environment by reducing the need to use cleaning chemicals
Temperature resistance:	-20C° to +70C°
Cleaning:	Wash with cold water, use a vacuum cleaner, or a pressure pump to remove dirt. The use of harsh detergents is not recommended