



- Effective, strong deterrent
- Easy to install and operate
- Lockable with padlock (not supplied)
- Option of 3 finishes



DEFENDER Drop Down Post

For quality, strength and a highly visible deterrence effect, the **DEFENDER** has it all for use in car parks, access to parking bays, driveways etc.

The **DEFENDER** is securely locked in position by means of a 'U' shaped locking pin, secured by a padlock (not supplied). Please ensure padlock shank does not exceed 5 mm Ø.

The **DEFENDER** has a drive over height of 110mm.

Specification:


Steel post: 60 mm Ø
Wall thickness: 2 mm
Base plate: 160 x 140 x 10 mm
(Surface fix)

Finish:

Hot dip galvanised or hot dip galvanised and painted.

Installation:

Sub-surface fix (with ground anchor) or Surface fix.

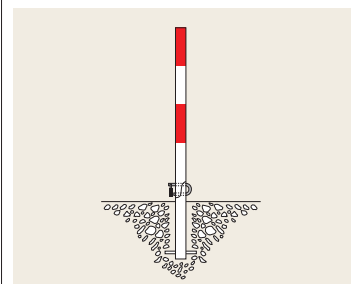

Locking system	Finish	Colour	Sub-Surface Fix O/all height 1,330 mm (33 mm Sub-surface)			Surface Fix Height 1,000 mm		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
With 'U' locking pin for padlock (padlock not supplied)	Hot dip galvanised	zinc grey	8.7	120.10.102	1 / 2 days	8.1	120.12.311	1 / 2 days
	Hot dip galvanised and painted	red/white		120.11.389			120.12.749	
		black/yellow		120.11.990			120.12.019	
Surface fixing bolts 8/100 (4 required per post)						0.2	109.17.393	1 / 2 days
Red reflector bands (2 per post) – contact us for prices								
Chain eyes – contact us for prices								15 / 20 days