

START **TRAFFIC**

MONSTER™

MOTION SAFETY

UC1210 SERIES WHEEL CHOCK

PRODUCT INFORMATION BROCHURE





PICTURED: UC1210

Checkers' Monster Wheel Chocks comply with the safety requirements of a variety of industries and ensure a safe working environment while your vehicles are at rest. Offered in a variety of styles, our wheel chocks provide a safe chocking solution for any type of vehicle.

Monster Wheel Chocks were engineered in collaboration with safety experts to work with a wide range of ground equipment, commercial, and military vehicles. Whether you are chocking a fully-loaded 400-ton haul truck or a utility trailer, we have the wheel chocks you need to safely secure your vehicle and meet compliance standards.

- **We are one of the largest manufacturers of wheel chocks in the world**
- **We manufacture the most popular wheel chocks in the highly-demanding mining industry**
- **Checkers wheel chocks are manufactured at company headquarters in Broomfield, Colorado**
- **Polyurethane wheel chocks are resistant to extreme weather conditions, tears, abrasions, oils, and solvents**
- **Polyurethane chocks are extremely lightweight compared to excessive steel and aluminum counterparts**
- **Long-lasting product life span results in cost savings**
- **Checkers produces a wheel chock for virtually every type of tire-based vehicle**
- **Our wheel chocks are engineered to reduce damage to your vehicle's tires**
- **High visibility safety colors used on most of our wheel chocks**
- **Checkers wheel chocks satisfy MSHA, OSHA, SAE, NFPA, and DOT compliance standards**
- **Recessed carrying handles included on most models**
- **Mounting brackets available for most models**

MONSTER GENERAL PURPOSE UC SERIES

WHEEL CHOCKS are manufactured with highly durable, lightweight polyurethane construction. These chocks are ideal for use with over-the-road trucks, trailers, pickups and utility vehicles.

Material: UV Stabilized Polyurethane

- Durable urethane construction
- Oil and chemical resistant
- Recessed carrying handle
- Molded-in "How to Use" guidelines
- Mounting hole for ropes, chains or brackets
- This chock is rated for tire diameters 46" to 65" (116.8 cm to 165.1 cm) and mass gross vehicle operating weight up to 245,000 lbs. (111,130 kg)



MODEL: UC1210


APPLICATIONS

- Civil Engineering and Construction
- Mining
- Military Sites
- Infrastructure and Utilities Maintenance
- Transmission
- Heavy Industry

ACCESSORIES



Model: MC1900

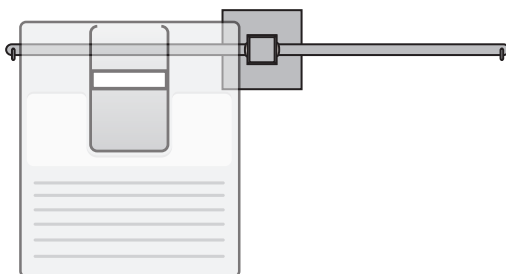

Model	Base Design	Length	Width	Height	Weight
UC1210	Aluminum Cleat Cored Bottom	15.5 in. (39.4 cm)	8.5 in. (21.6 cm)	8.25 in. (21.0 cm)	7.1 lb. (3.2 kg)
MC1900	Universal Dual Mounting Bracket holds 2 chocks. Hardware not included.	36 in. (91.4 cm)	6 in. (15.2 cm)	N/A	16 lb. (7.3 kg)



Start Traffic Ltd

Unit 30 North Bank

Berry Hill Ind Est

WR9 9AU

PHONE: 01905 794 875

EMAIL: sales@starttraffic.uk

www.starttraffic.uk

START  **TRAFFIC**

A PRODUCT OF:



For more information visit: www.checkers-safety.com

Checkers Safety Group is committed to providing revolutionary product designs and visionary safety solutions that protect people, assets, and the environment.

CHECKERS' FAMILY OF BRANDS:

