


Martcare™ Work restraint lanyard

Fixed length lanyard equipped with 2 standard karabiners on both ends.

**TECHNICAL
SPECIFICATION**

HEIGHT SAFETY


FAR0321

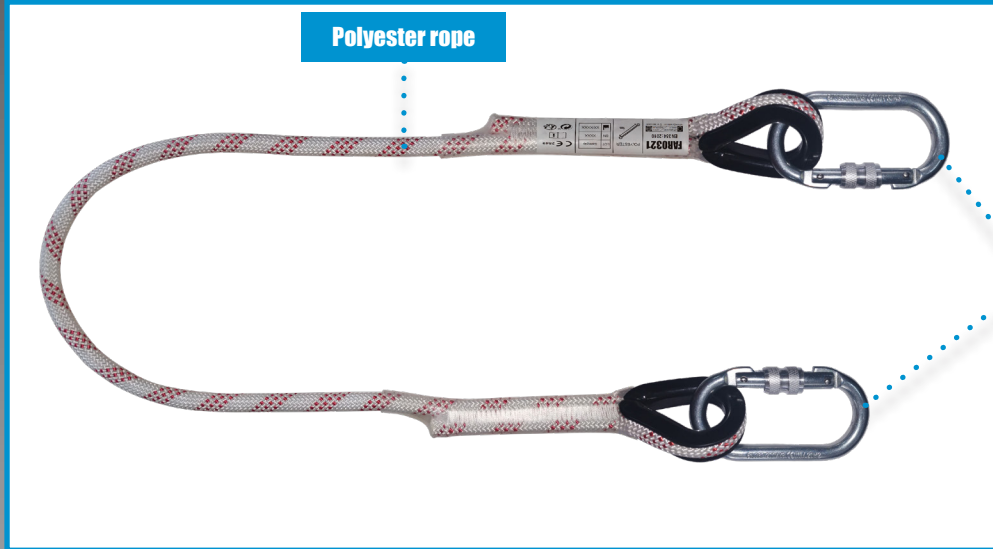

Polyester rope

Karabiners

Stitching pattern



METAL COMPONENTS

Material: Alloy steel connectors.

Finish: Silver.

STITCHING THREAD

Material: Polyester.

DIMENSIONS

Size: 1.2 meters

Weight: 550 g (+- 10 g)

ROPE

Material: polyester.

Diameter: 12 mm.

CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that NO alterations to the product are made.

Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

CHARACTERISTICS

12mm polyester rope lanyard with textile loops.

2 screw gate connectors in alloy steel. Gate opening 18 mm.
Conforms to EN362:2004 class B.

Connectors provided at both ends for attachment.

CONFORMITY

EN 354: 2010

The lifespan of the product is 5 years after date of first use, or, if not recorded, from date of manufacture.

Static strength: 22 kN for 3 Minutes.

Dynamic strength: Free fall from 4 m height with a test mass of 100 kgs.

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 15/06/2021-1