



01905 794 875
 StartSafety.uk
 sales@startsafety.uk

TOPSTOP-ECO



TOPSTOP-ECO
Speed Reduction Ramps

TOPSTOP-ECO Speed Reduction Ramps are the cost effective method of reducing traffic speeds. They are supplied in three versions to reduce speeds to 5mph, 10mph and 15mph respectively and are extensively used in potentially hazardous situations such as exit and entrance ways, bends, loading bays, weigh bridges, schools, manufacturing and office sites etc.

Manufactured from recycled plastics the **TOPSTOP-ECO** is supplied in alternating yellow and black sections with 'cats eyes' incorporated into the 5RE and 10RE sections for night time visibility.

Available in three heights:
TOPSTOP-ECO 5RE
 Height 70 mm for speeds up to 5 mph

TOPSTOP-ECO 10RE
 Height 50 mm for speeds up to 10 mph


TOPSTOP-ECO 15RE
 Height 30 mm for speeds up to 15 mph

We recommend that appropriate warning signs are used with these products.



We recommend the use of **TOPSTOP-ECO 10RE** and **15RE** for use on public roads.

Where strong shear loads are likely, we recommend that in addition to bolting down an adhesive is used to secure each section to the road surface.

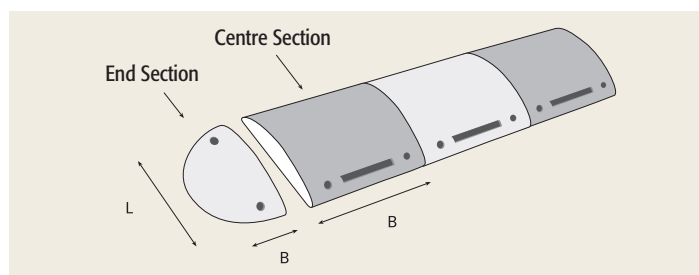

- Easily and quickly installed
- Recycled plastic
- Contrasting colours for daylight visibility
- Cost effective solution
- Sectional construction to suit site conditions

Description	Section	Colour	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
TOPSTOP-ECO 5RE	Ramp section	black	500 x 500 x 70	17	281.14.155	1 / 2 days
		yellow			281.18.436	
	End section – male	yellow	500 x 250 x 70	5.5	281.18.224	
	End section – female				281.15.317	
TOPSTOP-ECO 10RE	Ramp section	black	400 x 500 x 50	9.5	281.16.415	1 / 2 days
		yellow			281.18.692	
	End section – male	yellow	400 x 200 x 50	4	281.19.480	
	End section – female				281.15.466	
TOPSTOP-ECO 15RE	Ramp section	black	500 x 500 x 30	8.5	281.15.289	5 / 10 days
		yellow			281.16.941	
	End section	yellow	500 x 250 x 30	3	281.17.266	
Fixing bolts (4 per centre section – 2 per end section) Included			10/100	0.2	109.17.393	
2-Component adhesive – for attaching to surface if high shear loads are expected.			Approx. kg/sqm ²	13.4	282.18.654	5 / 10 days
				6.7	282.17.343	



TOPSTOPer Speed Reduction Bump

An extension of our Speed Ramp range which consists of two **TOPSTOP-ECO 5RE** end caps joined end to end to form a circle. They are ideal for effective speed reduction, traffic guidance, separation of traffic and non-traffic areas etc.

Manufactured from recycled plastic, and painted yellow for high visibility they are easy and quick to install.



Dimensions Ø x H (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
500 x 70	11	281.27.458	1 / 2 days
Fixing bolts (4 per piece) Included	0.2	109.17.393	